



OFFICIAL QUOTE

300HP 600 VOLTS THREE PHASE MOTOR STARTER



300HP 600 VOLTS THREE PHASE MOTOR STARTER


\$4,007.00 CAD

Three Phase Motor Starter with a capacity of
300HP, suitable for 600 Volt Systems

SKU: RS300J

Categories: [Motor Starting Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

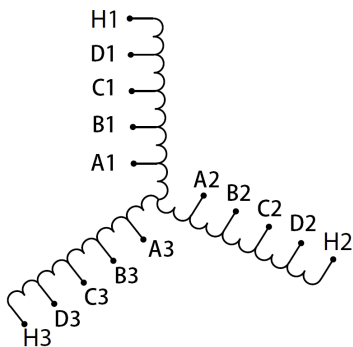

Three Phase Motor Starter with a capacity of 300HP, suitable for 600 Volt Systems



OFFICIAL QUOTE

300HP 600 VOLTS THREE PHASE MOTOR STARTER



PRODUCT SPECIFICATIONS

Weight	280 lbs
Phases	3
Connection	3PhA-ST-0-3
Primary Voltage	600
Primary Max Current	N/A
Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	50/65/80/100%
Secondary Max Current	N/A
Secondary Markings	A-B-C-D
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	150°C
Insuation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	N/A
Sound (db)	N/A
Enclosure Type	Core & Coil
Enclosure Size	N/A (Core & Coil)
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

300HP 600 VOLTS THREE PHASE
MOTOR STARTER



HP	300
Country/Manufacturer	Canada/RPM