



**200VA 120/240 VOLTS TO 12/24  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER**



# 200VA 120/240 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$139.40 USD**



Single Phase Control Transformer with a capacity of 200VA, transforming 120/240 Volts to 12/24 Volts

**SKU:** CS200K-Z

**Categories:** [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| VR Rating | Overall Dimensions |      |      |      |      | Mounting Straps<br>D x L | Mounting Slot |
|-----------|--------------------|------|------|------|------|--------------------------|---------------|
|           | A                  | B    | C    | D    | E    |                          |               |
|           | 25                 | 3    | 3    | 2.5  | 2.5  |                          |               |
| 50        | 3                  | 3    | 2.5  | 2.5  | 2.5  | 3.13                     | 0.25 x 0.625  |
| 100       | 3                  | 4    | 2.5  | 2.5  | 3    | 3.75                     | 0.25 x 0.625  |
| 150       | 3.75               | 4.25 | 3.13 | 3.25 | 3.5  | 4.5                      | 0.25 x 0.625  |
| 200       | 3.75               | 4.5  | 3.13 | 3.25 | 3.5  | 4.5                      | 0.25 x 0.625  |
| 250       | 3.75               | 5    | 3.13 | 3.25 | 3.5  | 4.5                      | 0.31 x 0.625  |
| 350       | 4.5                | 5    | 3.75 | 3.75 | 3.75 | 4.75                     | 0.31 x 0.625  |
| 500       | 5.25               | 5    | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 750       | 5.25               | 5.5  | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 1000      | 5.25               | 6.5  | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 1500      | 6.75               | 7.25 | 5.63 | 5    | 3.75 | 5.25                     | 0.31 x 0.625  |
| 2000      | 7.5                | 7.5  | 6.25 | 6    | 5.25 | 5.25                     | 0.31 x 0.625  |
| 2500      | 7.5                | 8.75 | 6.25 | 6    | 5.5  | 6.5                      | 0.31 x 0.625  |
| 5000      | 10                 | 10   | 8    | 7    | 7    | 8                        | 0.44 x 0.625  |

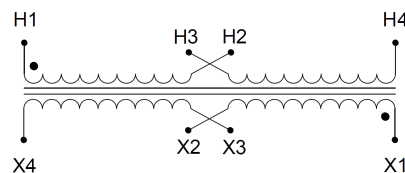

Single Phase Control Transformer with a capacity of 200VA, transforming 120/240 Volts to 12/24 Volts



## PRODUCT SPECIFICATIONS

|                            |  |
|----------------------------|--|
| Weight                     | 23 lbs   |
| Phases                     | <a href="#">1</a>  |
| Connection                 | <a href="#">1Ph-CT-DD-SD</a>   |
| Primary Voltage            | <a href="#">120/240</a>  |
| Primary Max Current        | <a href="#">1.67A</a>  |
| Primary Markings           | <a href="#">H1-H2-H3-H4</a>  |
| Primary Terminals          | <a href="#">Terminals</a>  |
| Secondary Voltage          | <a href="#">12/24</a>  |
| Secondary Max Current      | <a href="#">16.67A</a>   |
| Secondary Markings         | <a href="#">X1-X2-X3-X4</a>  |
| Secondary Terminals        | <a href="#">Terminals</a>  |
| Primary Taps               | <a href="#">N/A</a>  |
| Conductor Material         | <a href="#">Copper</a>   |
| Temperatue Rise            | <a href="#">80°C</a>   |
| Insuation Class            | <a href="#">130°C (Class B)</a>  |
| BIL (Insulation) Level     | <a href="#">10kV</a>   |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>   |
| Sound (db)                 | <a href="#">40</a>   |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>  |
| Enclosure Size             | <a href="#">See Core &amp; Coil Chart</a>  |
| Finish/Colour              | <a href="#">N/A</a>  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

200VA 120/240 VOLTS TO 12/24  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| VA                   | <a href="#">200</a>        |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |