



**200VA 600 VOLTS TO 12/24 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**



200VA 600 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$174.72 CAD



Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 12/24 Volts

SKU: CS200H-Z

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions					Mounting Stud Dia.	Mounting Stud
	Core Dimensions				Core Height		
	A	B	C	D			
25	3	3	2.5	2.5	3.5	3.13	0.25 x 0.625
50	3	3	2.5	2.5	2.5	3.13	0.25 x 0.625
100	3	4	2.5	2.5	3	3.75	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625
300	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5	4.38	4.5	3.75	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	5.63	5.25	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	5.5	0.31 x 0.625
5000	9	10	8	7	7	8	0.44 x 0.625

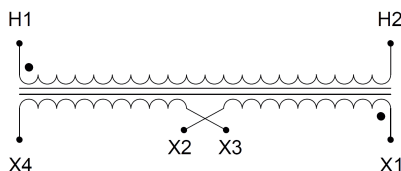

Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 12/24 Volts



OFFICIAL QUOTE

200VA 600 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	8 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	600
Primary Max Current	0.33A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	12/24
Secondary Max Current	16.67A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

200VA 600 VOLTS TO 12/24 VOLTS

SINGLE PHASE CONTROL

TRANSFORMER

VA	200
Country/Manufacturer	Canada/RPM