




## OFFICIAL QUOTE

### 2000KVA 230 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

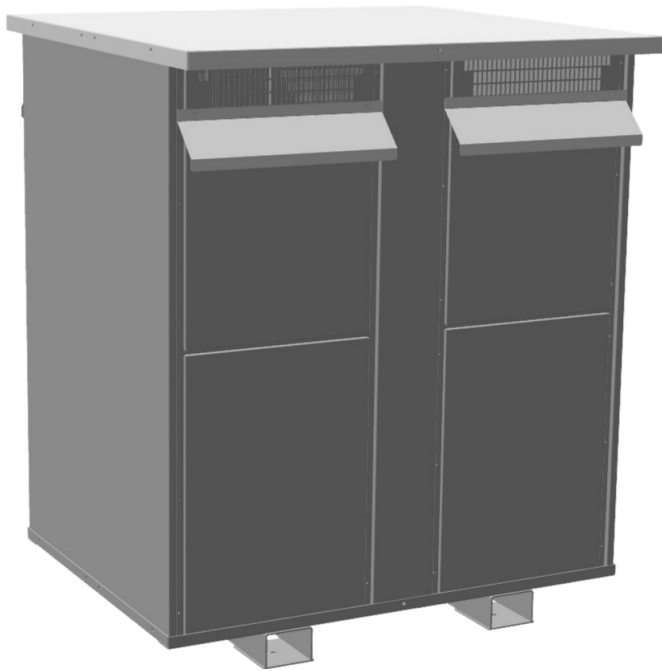

## 2000KVA 230 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



**\$32,282.60 CAD**

Three Phase Autotransformer with a capacity of 2000kVA, transforming 230Y Volts to 347Y Volts

**SKU:** RA2000C1-E

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

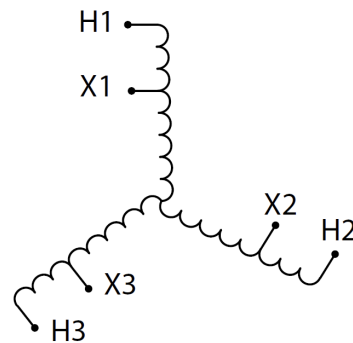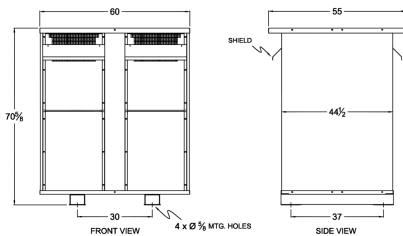

Three Phase Autotransformer with a capacity of 2000kVA, transforming 230Y Volts to 347Y Volts



## OFFICIAL QUOTE

### 2000KVA 230 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



#### PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 4627 lbs                                                                                             |
| Phases                     | <a href="#">3</a>                                                                                    |
| kVA                        | <a href="#">2000</a>                                                                                 |
| Connection                 | <a href="#">3PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">230</a>                                                                                  |
| Primary Max Current        | <a href="#">5020.4A</a>                                                                              |
| Primary Markings           | <a href="#">X1-X2-X3</a>                                                                             |
| Primary Terminals          | <a href="#">Pads</a>                                                                                 |
| Secondary Voltage          | <a href="#">347</a>                                                                                  |
| Secondary Max Current      | <a href="#">3327.7A</a>                                                                              |
| Secondary Markings         | <a href="#">H1-H2-H3</a>                                                                             |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Aluminum</a>                                                                             |
| Insulation Class           | <a href="#">220°C (Class H)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">1.0 – 3.0%</a>                                                                           |
| Sound (db)                 | <a href="#">62</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure Size             | <a href="#">E3R-11</a>                                                                               |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

2000KVA 230 VOLTS TO 347 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)