



## 30KVA 208 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



**\$2,920.50 CAD**

Three Phase Autotransformer with a capacity of 30kVA, transforming 208Y Volts to 600Y Volts

SKU: RA30B-J

Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

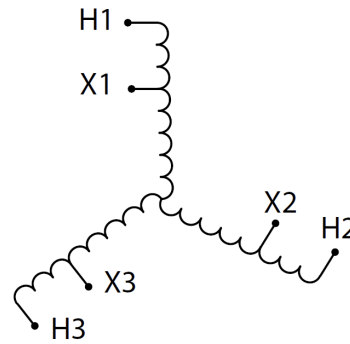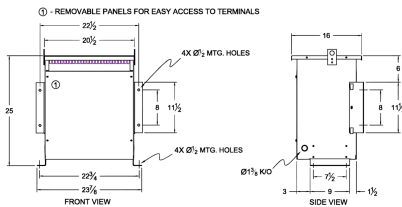

Three Phase Autotransformer with a capacity of 30kVA, transforming 208Y Volts to 600Y Volts



PRODUCT SPECIFICATIONS

<b>Weight</b>	124 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">30</a>
<b>Connection</b>	<a href="#">3PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">208</a>
<b>Primary Max Current</b>	<a href="#">83.3A</a>
<b>Primary Markings</b>	<a href="#">X1-X2-X3</a>
<b>Primary Terminals</b>	<a href="#">#2/0-6 AWG</a>
<b>Secondary Voltage</b>	<a href="#">600</a>
<b>Secondary Max Current</b>	<a href="#">28.9A</a>
<b>Secondary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Secondary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Aluminum</a>
<b>Insulation Class</b>	<a href="#">220°C (Class H)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">2.5 – 4.5%</a>
<b>Sound (db)</b>	<a href="#">45</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-5</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

30KVA 208 VOLTS TO 600 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)