




## OFFICIAL QUOTE

### 3KVA 600 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER

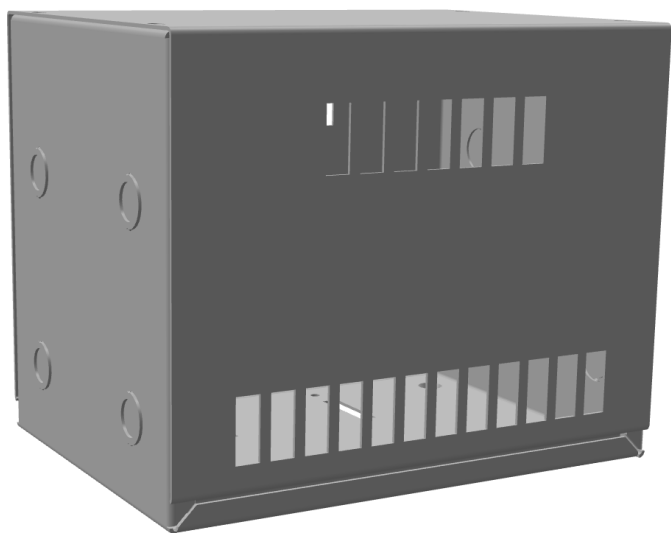

## 3KVA 600 VOLTS TO 200 VOLTS SINGLE PHASE AUTOTRANSFORMER



**\$893.80 CAD**

Single Phase Autotransformer with a capacity of 3kVA, transforming 600 Volts to 200 Volts

**SKU:** MC3J-B1

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

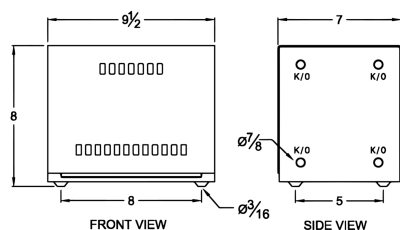

Single Phase Autotransformer with a capacity of 3kVA, transforming 600 Volts to 200 Volts



## OFFICIAL QUOTE

3KVA 600 VOLTS TO 200 VOLTS  
SINGLE PHASE AUTOTRANSFORMER

## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 61.2 lbs                                                                                             |
| Phases                     | <a href="#">1</a>                                                                                    |
| kVA                        | <a href="#">3</a>                                                                                    |
| Connection                 | <a href="#">1PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">600</a>                                                                                  |
| Primary Max Current        | <a href="#">2.9A</a>                                                                                 |
| Primary Markings           | <a href="#">H0-H1</a>                                                                                |
| Primary Terminals          | <a href="#">Terminal Blocks</a>                                                                      |
| Secondary Voltage          | <a href="#">200</a>                                                                                  |
| Secondary Max Current      | <a href="#">8.7A</a>                                                                                 |
| Secondary Markings         | <a href="#">X0-X1</a>                                                                                |
| Secondary Terminals        | <a href="#">Terminal Blocks</a>                                                                      |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insulation Class           | <a href="#">180°C (Class F)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">2.5 – 4.5%</a>                                                                           |
| Sound (db)                 | <a href="#">40 dB</a>                                                                                |
| Enclosure Type             | <a href="#">NEMA 1</a>                                                                               |
| Enclosure Size             | <a href="#">E1-0</a>                                                                                 |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

3KVA 600 VOLTS TO 200 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)