


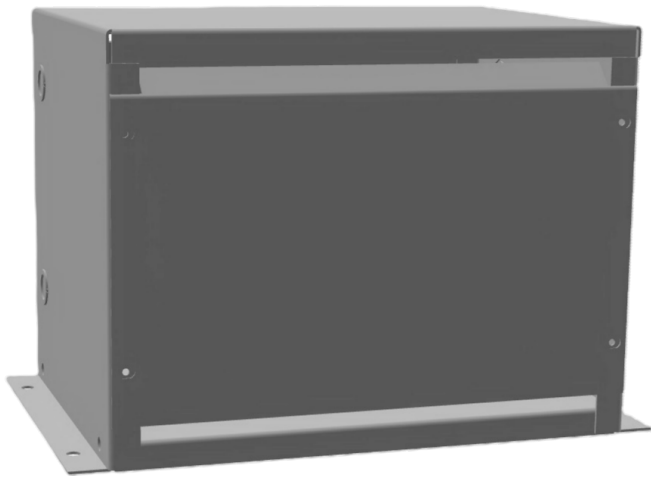

## 6KVA 400 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



**\$893.90 CAD**

Three Phase Autotransformer with a capacity of 6kVA, transforming 400Y Volts to 440Y Volts

SKU: RC6G1-H2

Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

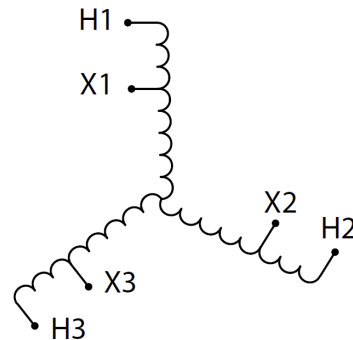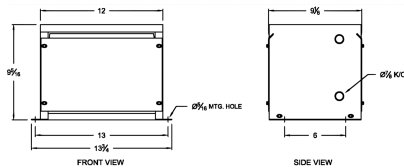

Three Phase Autotransformer with a capacity of 6kVA, transforming 400Y Volts to 440Y Volts



## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 20 lbs                                                                                               |
| Phases                     | <a href="#">3</a>                                                                                    |
| kVA                        | <a href="#">6</a>                                                                                    |
| Connection                 | <a href="#">3PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">400</a>                                                                                  |
| Primary Max Current        | <a href="#">8.7A</a>                                                                                 |
| Primary Markings           | <a href="#">X1-X2-X3</a>                                                                             |
| Primary Terminals          | <a href="#">Terminal Blocks</a>                                                                      |
| Secondary Voltage          | <a href="#">440</a>                                                                                  |
| Secondary Max Current      | <a href="#">7.9A</a>                                                                                 |
| Secondary Markings         | <a href="#">H1-H2-H3</a>                                                                             |
| Secondary Terminals        | <a href="#">Terminal Blocks</a>                                                                      |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insulation Class           | <a href="#">180°C (Class F)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">0.5 – 1.5%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 1</a>                                                                               |
| Enclosure Size             | <a href="#">E1-1</a>                                                                                 |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE  
6KVA 400 VOLTS TO 440 VOLTS  
THREE PHASE AUTOTRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| Country/Manufacturer | <a href="#">Canada/RPM</a> |
|----------------------|----------------------------|