




## OFFICIAL QUOTE

### 7.5KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

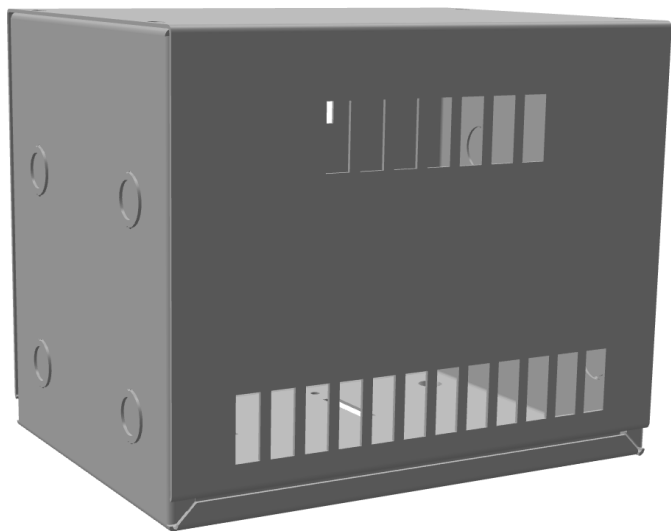

## 7.5KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



**\$764.80 CAD**

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 200 Volts to 240 Volts

**SKU:** MC7B1-C

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

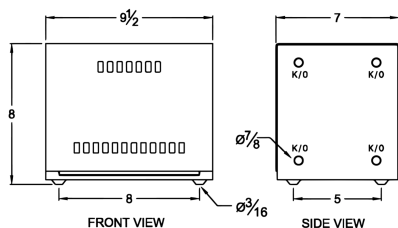

Single Phase Autotransformer with a capacity of 7.5kVA, transforming 200 Volts to 240 Volts



## OFFICIAL QUOTE

### 7.5KVA 200 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



#### PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 56.5 lbs                                                                                             |
| Phases                     | <a href="#">1</a>                                                                                    |
| kVA                        | <a href="#">7.5</a>                                                                                  |
| Connection                 | <a href="#">1PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">200</a>                                                                                  |
| Primary Max Current        | <a href="#">21.7A</a>                                                                                |
| Primary Markings           | <a href="#">X0-X1</a>                                                                                |
| Primary Terminals          | <a href="#">Terminal Blocks</a>                                                                      |
| Secondary Voltage          | <a href="#">240</a>                                                                                  |
| Secondary Max Current      | <a href="#">18A</a>                                                                                  |
| Secondary Markings         | <a href="#">H0-H1</a>                                                                                |
| Secondary Terminals        | <a href="#">Terminal Blocks</a>                                                                      |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insulation Class           | <a href="#">180°C (Class F)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">0.5 – 1.5%</a>                                                                           |
| Sound (db)                 | <a href="#">40 dB</a>                                                                                |
| Enclosure Type             | <a href="#">NEMA 1</a>                                                                               |
| Enclosure Size             | <a href="#">E1-0</a>                                                                                 |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

7.5KVA 200 VOLTS TO 240 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)