OFFICIAL QUOTE

1000VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

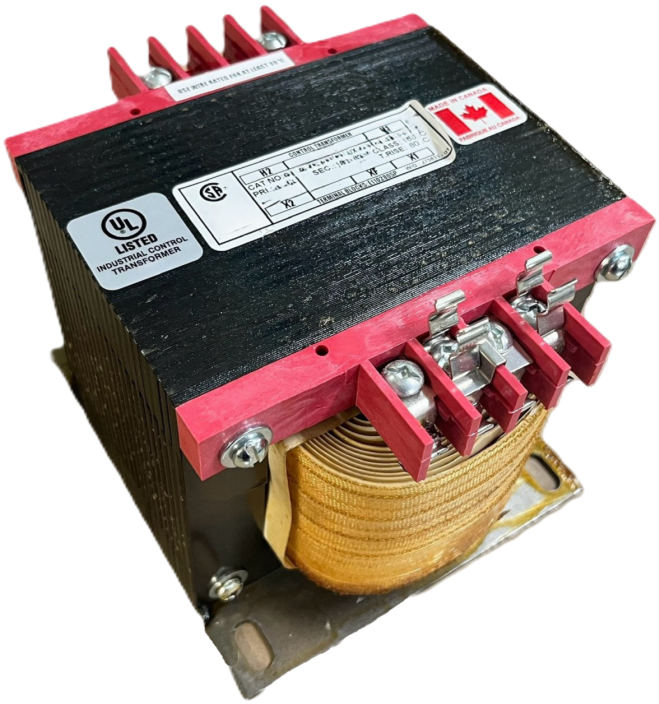

1000VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

$471.38 CAD

Single Phase Control Transformer with a capacity of 1000VA, transforming 208 Volts to 120/240 Volts

SKU: CS1000B-K
Categories: Control Transformers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers - Table of Dimensions (inches)

VA Rating	Overall Dimensions A	B	C	Mounting Centres D x E	F	Mounting Slot
25	3	3	2.5	2.5	2.5	3.13	0.25 x 0.625
50	3	3	2.5	2.5	2.5	3.13	0.25 x 0.625
100	3	4	2.5	2.5	3	3.75	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5	4.38	4.5	3.75	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	32.75	4.75	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	4.75	5.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.5	0.31 x 0.625
5000	9	10	8	7	7	8	0.44 x 0.625



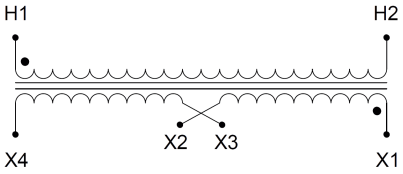

Single Phase Control Transformer with a capacity of 1000VA, transforming 208 Volts to 120/240 Volts

OFFICIAL QUOTE

1000VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	23 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	208
Primary Max Current	4.81A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	8.33A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered

OFFICIAL QUOTE

1000VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

VA	1000
Country/Manufacturer	Canada/RPM