



**200VA 480 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER**



# 200VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$174.72 CAD**



Single Phase Control Transformer with a capacity of 200VA, transforming 480 Volts to 120/240 Volts

**SKU:** CS200H-K

**Categories:** [Control Transformers](#)

## SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| VR Rating | Overall Dimensions |      |      |      |      | Mounting Straps<br>D x L | Mounting Slot |
|-----------|--------------------|------|------|------|------|--------------------------|---------------|
|           | A                  | B    | C    | D    | E    |                          |               |
|           | 25                 | 3    | 3    | 2.5  | 2.5  |                          |               |
| 50        | 3                  | 3    | 2.5  | 2.5  | 2.5  | 3.13                     | 0.25 x 0.625  |
| 100       | 3                  | 4    | 2.5  | 2.5  | 3    | 3.75                     | 0.25 x 0.625  |
| 150       | 3.75               | 4.25 | 3.13 | 3.25 | 3.5  | 4.5                      | 0.25 x 0.625  |
| 200       | 3.75               | 4.5  | 3.13 | 3.25 | 3.5  | 4.5                      | 0.25 x 0.625  |
| 250       | 3.75               | 5    | 3.13 | 3.25 | 3.5  | 4.5                      | 0.31 x 0.625  |
| 350       | 4.5                | 5    | 3.75 | 3.75 | 3.75 | 4.75                     | 0.31 x 0.625  |
| 500       | 5.25               | 5    | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 750       | 5.25               | 5.5  | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 1000      | 5.25               | 6.5  | 4.38 | 4.5  | 3.75 | 4.75                     | 0.31 x 0.625  |
| 1500      | 6.75               | 7.25 | 5.63 | 5    | 3.75 | 5.25                     | 0.31 x 0.625  |
| 2000      | 7.5                | 7.5  | 6.25 | 6    | 5.25 | 5.25                     | 0.31 x 0.625  |
| 2500      | 7.5                | 8.75 | 6.25 | 6    | 5.5  | 6.5                      | 0.31 x 0.625  |
| 5000      | 10                 | 10   | 8    | 7    | 7    | 8                        | 0.44 x 0.625  |

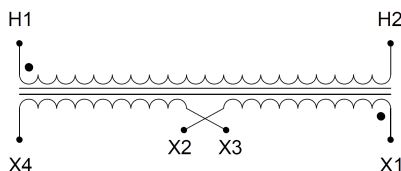

Single Phase Control Transformer with a capacity of 200VA, transforming 480 Volts to 120/240 Volts

The quote is valid 30 days from 14 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to [sales@transformersource.ca](mailto:sales@transformersource.ca). Printed: September-16-2024.



## OFFICIAL QUOTE

### 200VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



#### PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 23 lbs                                                                                               |
| Phases                     | <a href="#">1</a>                                                                                    |
| Connection                 | <a href="#">1Ph-CT-SD-SD</a>                                                                         |
| Primary Voltage            | <a href="#">480</a>                                                                                  |
| Primary Max Current        | <a href="#">0.42A</a>                                                                                |
| Primary Markings           | <a href="#">H1-H2</a>                                                                                |
| Primary Terminals          | <a href="#">Terminals</a>                                                                            |
| Secondary Voltage          | <a href="#">120/240</a>                                                                              |
| Secondary Max Current      | <a href="#">1.67A</a>                                                                                |
| Secondary Markings         | <a href="#">X1-X2-X3-X4</a>                                                                          |
| Secondary Terminals        | <a href="#">Terminals</a>                                                                            |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">80°C</a>                                                                                 |
| Insuation Class            | <a href="#">130°C (Class B)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure Size             | <a href="#">See Core &amp; Coil Chart</a>                                                            |
| Finish/Colour              | <a href="#">N/A</a>                                                                                  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

200VA 480 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER

|                      |                            |
|----------------------|----------------------------|
| VA                   | <a href="#">200</a>        |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |