

3000VA 600 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$993.72 CAD



Single Phase Control Transformer with a capacity of 3000VA, transforming 600 Volts to 240/480 Volts

SKU: CS3000J-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

kVA	Overall Dimensions (Inches)					
	A	B	C	Mounting Centre Spacing		F
25	3	3	2.5	2.5	2.5	3.33
30	3	3	2.5	2.5	2.5	3.33
100	3	4	2.5	2.5	3	3.75
150	3.75	4.25	3.33	3.25	3.5	4.5
200	3.75	4.5	3.33	3.25	3.5	4.5
250	3.75	5	3.33	3.25	3.5	4.5
350	4.5	5	3.75	3.75	3.75	4.75
500	5.25	5	4.38	4.5	3.75	4.75
750	5.25	5.5	4.38	4.5	3.75	4.75
1000	5.25	6.5	4.38	4.5	4.75	5.75
1500	6.75	7.25	5.63	5	3.75	5.25
2000	7.5	7.5	6.25	6	4.25	5.25
3000	7.5	8.75	6.25	6	6.5	6.5
5000	9	10	8	7	7	8

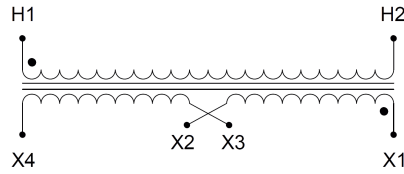

Single Phase Control Transformer with a capacity of 3000VA, transforming 600 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	70 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	600
Primary Max Current	5A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	12.5A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

3000VA 600 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	3000
Country/Manufacturer	Canada/RPM