



## 5000VA 600 VOLTS TO 120 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$1,729.00 CAD**



Single Phase Control Transformer with a capacity of 5000VA, transforming 600 Volts to 120 Volts

SKU: CS5000J-A

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Volts Rating	A	B	C	Mounting Centres D-E	F	Mounting Slot
25	3	3	2.5	2.5	3.33	0.25 x 0.425
30	3	3	2.5	2.5	3.33	0.25 x 0.425
100	3	4	2.5	2.5	3.75	0.25 x 0.425
150	3.75	4.25	3.33	3.25	3.5	0.25 x 0.425
200	3.75	4.5	3.33	3.25	3.5	0.25 x 0.425
250	3.75	5	3.33	3.25	3.5	0.31 x 0.425
350	4.5	5	3.75	3.75	4.75	0.31 x 0.425
500	5.25	5	4.38	4.5	5.75	0.31 x 0.425
750	5.25	5.5	4.38	4.5	5.75	0.31 x 0.425
1000	5.25	6.5	4.38	4.5	5.75	0.31 x 0.425
1500	6.75	7.25	5.83	5	5.75	0.31 x 0.425
2000	7.5	7.5	6.25	6	6.25	0.31 x 0.425
3000	9	10	8	7	8	0.44 x 0.425

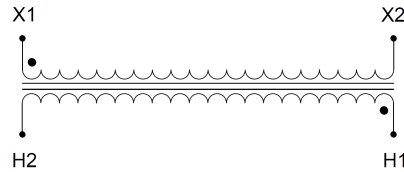

Single Phase Control Transformer with a capacity of 5000VA, transforming 600 Volts to 120 Volts



## PRODUCT SPECIFICATIONS

Weight	110 lbs
Phases	<a href="#">1</a>
Connection	<a href="#">1Ph-CT-SS-SU</a>
Primary Voltage	<a href="#">600</a>
Primary Max Current	<a href="#">8.33A</a>
Primary Markings	<a href="#">H1-H2</a>
Primary Terminals	<a href="#">Terminals</a>
Secondary Voltage	<a href="#">120</a>
Secondary Max Current	<a href="#">41.67A</a>
Secondary Markings	<a href="#">X1-X2</a>
Secondary Terminals	<a href="#">Terminals</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Temperatue Rise	<a href="#">115°C</a>
Insuation Class	<a href="#">180°C (Class F)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">Core &amp; Coil</a>
Enclosure Size	<a href="#">See Core &amp; Coil Chart</a>
Finish/Colour	<a href="#">N/A</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE  
5000VA 600 VOLTS TO 120 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



VA	<a href="#">5000</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>