# 50HP 600 VOLTS THREE PHASE MOTOR STARTER

## $1,247.00 CAD

Three Phase Motor Starter with a capacity of 50HP, suitable for 600 Volt Systems

**SKU:** RS50J
**Categories:** Motor Starting Autotransformers

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

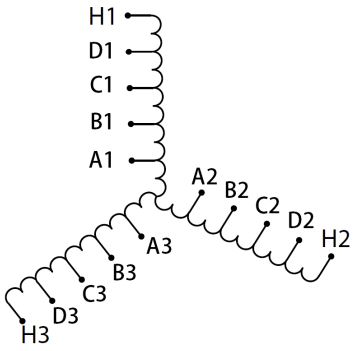


Three Phase Motor Starter with a capacity of 50HP, suitable for 600 Volt Systems

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| **Weight** | 90 lbs |
| **Phases** | 3 |
| **Connection** | 3PhA-ST-0-3 |
| **Primary Voltage** | 600 |
| **Primary Max Current** | N/A |
| **Primary Markings** | H1-H2-H3 |
| **Primary Terminals** | Pads |
| **Secondary Voltage** | 65/80/100% |
| **Secondary Max Current** | N/A |
| **Secondary Markings** | A-B-C-D |
| **Secondary Terminals** | Pads |
| **Primary Taps** | N/A |
| **Conductor Material** | Copper |
| **Temperatue Rise** | 150°C |
| **Insuation Class** | 220°C (Class H) |
| **BIL (Insulation) Level** | 10kV |
| **Efficiency (@35% Load) %** | N/A |
| **Impedance Range** | N/A |
| **Sound (db)** | N/A |
| **Enclosure Type** | Core & Coil |
| **Enclosure Size** | N/A (Core & Coil) |
| **Finish/Colour** | N/A |
| **Standards & Certifications** | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |

| | |
|---|---|
| **HP** | 50 |
| **Country/Manufacturer** | Canada/RPM |