


OFFICIAL QUOTE

300KVA 600 VOLTS TO 480 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



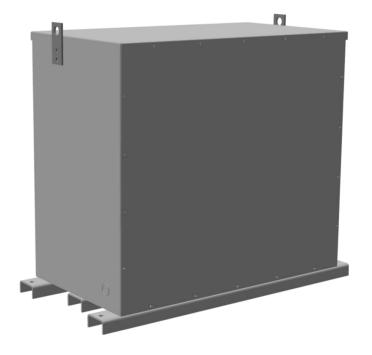


300KVA 600 VOLTS TO 480 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$10,581.00 CAD

Three Phase Encapsulated Autotransformer with a capacity of 300kVA, transforming 600Y Volts to 480Y Volts

SKU: RA300J-H/EP Categories: <u>Encapsulated Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 300kVA, transforming 600Y Volts to 480Y Volts



OFFICIAL QUOTE

300KVA 600 VOLTS TO 480 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 1160 lbs |
|----------------------------|---|
| Phases | <u>3</u> |
| kVA | 300 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 600 |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | Pads |
| Secondary Voltage | 480 |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | Pads |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | 50 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-3PEP-7</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | <u>130°C</u> |
| Insuation Class | 200°C (Class N) |

The quote is valid 30 days from 24 May 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.