



OFFICIAL QUOTE





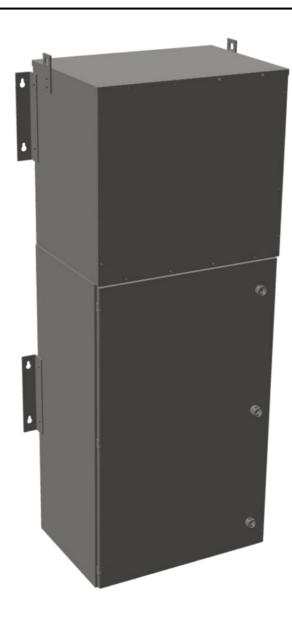


45KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER


\$12,845.01 USD

SKU: MP3A45J-M

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE



45KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | | |
|-----------------------------|--|--|
| Weight | 960 lbs | |
| Phases | 3 | |
| kVA | 45 | |
| Connection | MPC3P-5t | |
| Primary Taps | +/- 2 x 2.5% | |
| Conductor Material | Aluminum | |
| BIL (Insulation) Level | 10kV | |
| Impedance Range | 1.5 - 3.0% | |
| Enclosure Type | NEMA 3R Outdoor | |
| Enclosure Size | E3R-3PMPC-4 | |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey | |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered | |
| Incoming Voltage | 600 | |
| Primary Breaker | 90A | |
| Interruping Rating | 14kAIC @ 600V | |
| Output Voltage | <u>208Y/120</u> | |
| Secondary Breaker | 150A | |
| Short Circuit Withstand | 25kAIC @ 240V | |
| Panel Board | Push-On | |
| Load Center Bus Material | Aluminum | |
| # of Circuits | 30 | |
| Circuit Breaker Suitability | Eaton Type BR | |
| Temperatue Rise | 130°C | |



OFFICIAL QUOTE



45KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

| - | Insuation Class | 200°C (Class N) |
|---|----------------------|-----------------|
| | Country/Manufacturer | Canada/RPM |