




OFFICIAL QUOTE

7.5KVA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

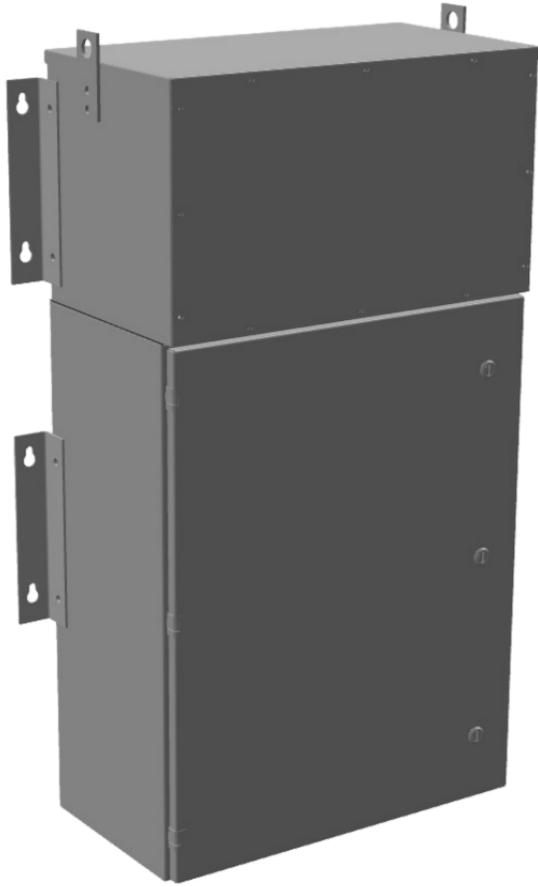


7.5KVA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

\$8,809.00 CAD


SKU: MP1C7H-K/BO/CLC

Categories: [Mini Power Centers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



| Ref | A | B | C | D | E | F | G | H |
|--------------|-------|------|------|------|----|---|------|-------|
| Dim (inches) | 23.25 | 12.5 | 43.5 | 13.5 | 26 | 8 | 11.5 | 25.25 |



PRODUCT SPECIFICATIONS

The quote is valid 30 days from 14 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE



7.5KVA 480 VOLTS TO 120/240 VOLTS
SINGLE PHASE BOLT-ON BREAKER
MINI POWER CENTER

| | |
|---------------------------------------|--|
| Weight | 275 lbs |
| Phases | 1 |
| kVA | 7.5 |
| Connection | MPC1P-3t |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | 10kV |
| Impedance Range | 1.5 – 3.0% |
| Enclosure Type | NEMA 3R Outdoor |
| Enclosure Size | E3R-1PMPC-1B |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered |
| Incoming Voltage | 480 |
| Primary Breaker | 30A |
| Interrupting Rating | 14kAIC @ 480V |
| Output Voltage | 120/240 |
| Secondary Breaker | 40A |
| Short Circuit Withstand | 10kAIC @ 240V |
| Panel Board | Bolt-On |
| Load Center Bus Material | Copper |
| # of Circuits | 18 |
| Circuit Breaker Suitability | Eaton Type BAB |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C (Class N) |
| Country/Manufacturer | Canada/RPM |