




OFFICIAL QUOTE

150KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

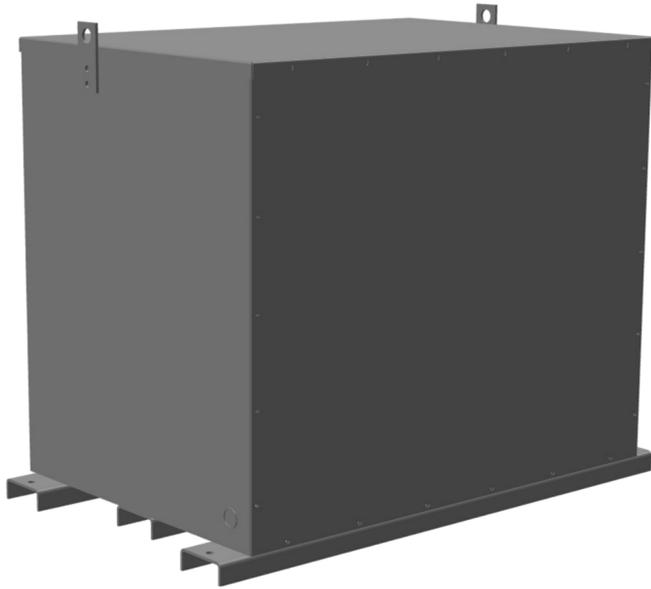

150KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



\$17,141.00 CAD

Three Phase Encapsulated Autotransformer with a capacity of 150kVA, transforming 600Y Volts to 208Y Volts

SKU: RC150J-B/EP

Categories: [Encapsulated Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

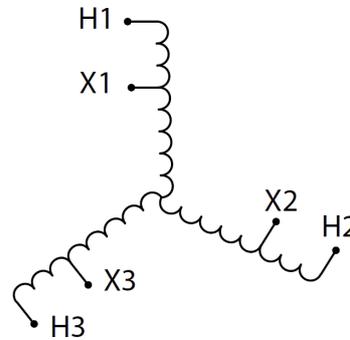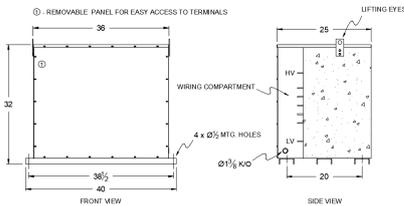

Three Phase Encapsulated Autotransformer with a capacity of 150kVA, transforming 600Y Volts to 208Y Volts



OFFICIAL QUOTE

150KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1365 lbs
Phases	3
kVA	150
Connection	3PhA-NT-1
Primary Voltage	600
Primary Markings	H1-H2-H3
Primary Terminals	300MCM-6
Secondary Voltage	208
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-3PEP-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	130°C
Insuation Class	200°C (Class N)