




OFFICIAL QUOTE



**15KVA 480 VOLTS TO 208Y/120
VOLTS THREE PHASE BOLT-ON
BREAKER MINI POWER CENTER**

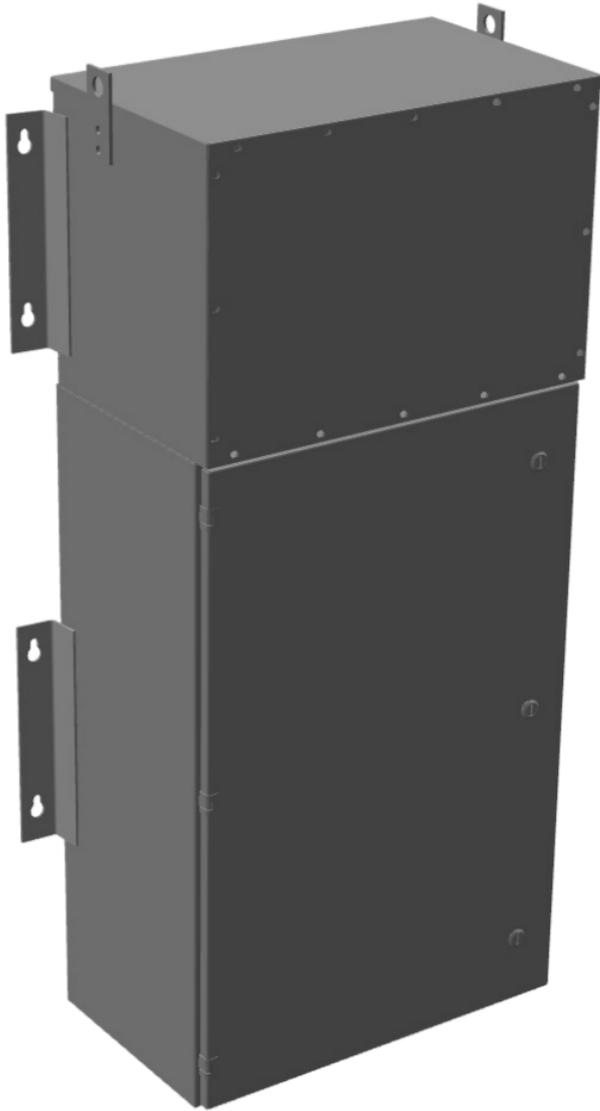



15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER

\$12,002.00 CAD

SKU: MP3A15H-M/BO/CLC

Categories: [Mini Power Centers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





OFFICIAL QUOTE



**15KVA 480 VOLTS TO 208Y/120
VOLTS THREE PHASE BOLT-ON
BREAKER MINI POWER CENTER**

PRODUCT SPECIFICATIONS

Weight	475 lbs
Phases	3
kVA	15
Connection	MPC3P-5t
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Impedance Range	1.5 – 3.0%
Enclosure Type	NEMA 3R Outdoor
Enclosure Size	E3R-3PMPC-2B
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
Incoming Voltage	480
Primary Breaker	40A
Interrupting Rating	14kAIC @ 480V
Output Voltage	208Y/120
Secondary Breaker	50A
Short Circuit Withstand	10kAIC @ 240V
Panel Board	Bolt-On
Load Center Bus Material	Copper
# of Circuits	30
Circuit Breaker Suitability	Eaton Type BAB
Temperatue Rise	130°C



OFFICIAL QUOTE



15KVA 480 VOLTS TO 208Y/120
VOLTS THREE PHASE BOLT-ON
BREAKER MINI POWER CENTER

Insuation Class	200°C (Class N)
Country/Manufacturer	Canada/RPM