





## SC5H1-K/EP

**\$1,714.00 CAD**

**SKU:** 42d1c2cfdfe6

**Categories:** [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

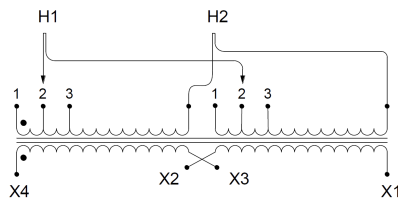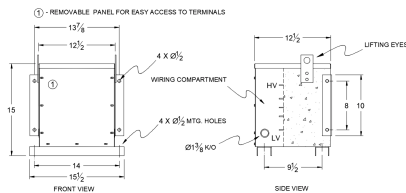

### PRODUCT SPECIFICATIONS

<b>Weight</b>	155 lbs
<b>Phases</b>	<a href="#">1</a>
<b>kVA</b>	<a href="#">5</a>
<b>Connection</b>	<a href="#">1Ph-2coil-3t-SD</a>
<b>Primary Voltage</b>	<a href="#">460</a>
<b>Primary Max Current</b>	<a href="#">10.9A</a>
<b>Primary Markings</b>	<a href="#">H1-H2</a>



Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">120/240</a>
Secondary Max Current	<a href="#">41.7A</a>
Secondary Markings	<a href="#">X1-X3-X2-X4</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
Temperatue Rise	<a href="#">115°C</a>
Insuation Class	<a href="#">180°C</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency	<a href="#">N/A</a>
Impedance	<a href="#">1.5 – 3.5%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure	<a href="#">E3R-1PEP-4</a>
Finish	<a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>