





BC75Q-M/Z3

\$8,123.00 CAD

SKU: 90bffabe64dd

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

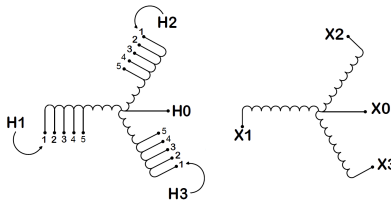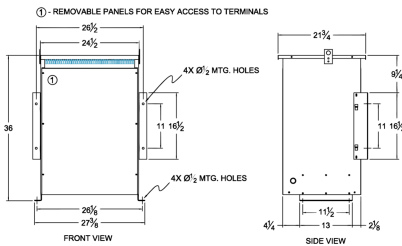

PRODUCT SPECIFICATIONS

| | |
|------------------------|---------------------|
| Weight | 670 lbs |
| Phases | <u>3</u> |
| kVA | <u>75</u> |
| Connection | <u>3Ph-YY-5T-SD</u> |
| Primary Voltage | <u>600Y/347</u> |



| | |
|---------------------------------------|--|
| Primary Max Current | 72.2A |
| Primary Markings | H0-H1-H2-H3 |
| Primary Terminals | #2/0-6 AWG |
| Secondary Voltage | 208Y/120 |
| Secondary Max Current | 208.2A |
| Secondary Markings | X0-X1-X2-X3 |
| Secondary Terminals | 600MCM-2 |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Copper |
| Insulation Class | 220°C |
| BIL (Insulation) Level | 10kV |
| Impedance | 4.0 – 6.0% |
| Sound (db) | 50 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | E3R-7 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | 98.74% |