




**75VA 208 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**

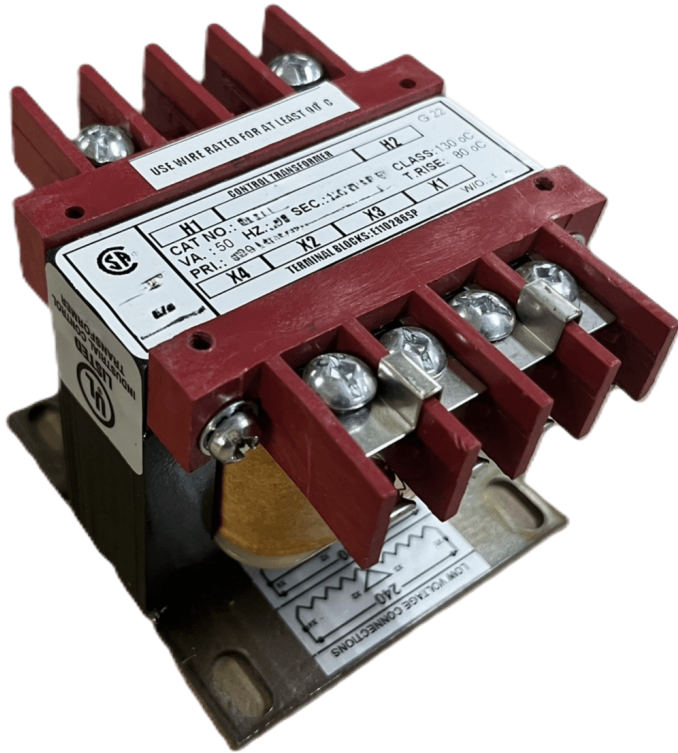

75VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$111.02 CAD



Single Phase Control Transformer with a capacity of 75VA, transforming 208 Volts to 120/240 Volts

SKU: CS75B-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions						
	A	B	Mounting Centers			Mounting Slot	
			X	Y	Z		
25	3	3	2.5	2.5	2.5	0.13	0.25 ± 0.025
50	3	3	2.5	2.5	2.5	0.13	0.25 ± 0.025
75	3	4	2.5	2.5	3	0.75	0.25 ± 0.025
100	3	4	2.5	2.5	3	1.75	0.25 ± 0.025
125	3.75	4.25	3.13	3.25	3	0.75	0.31 ± 0.025
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 ± 0.025
250	3.75	5	3.13	3.25	3.5	4.5	0.31 ± 0.025
350	4.5	5	3.75	3.75	3.75	4.75	0.31 ± 0.025
500	5.25	5	4.38	4.5	3.75	4.75	0.31 ± 0.025
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 ± 0.025
1000	5.25	6	4.38	4.5	3.75	4.75	0.31 ± 0.025
1250	6.75	7.25	5.5	5	3.75	5.25	0.31 ± 0.025
1500	7.5	7.5	6.25	6.25	4.5	5.25	0.31 ± 0.025
1800	7.5	8.75	6.25	6	5.5	5.5	0.31 ± 0.025
5000	9	10	8	7	7	8	0.44 ± 0.025

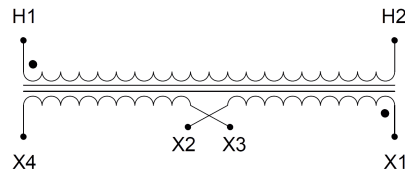

Single Phase Control Transformer with a capacity of 75VA, transforming 208 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

Weight	5 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	208
Primary Max Current	0.36A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	0.63A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

75VA 208 VOLTS TO 120/240 VOLTS

SINGLE PHASE CONTROL

TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM