



50VA 480 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$94.64 CAD


Single Phase Control Transformer with a capacity of 50VA, transforming 480 Volts to 240/480 Volts

SKU: CS50H-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA	Overall Dimensions				Mounting Centres		Mounting Slot	
Rating	A	B	C	D	E	F	G	H
25	3	3	2.5	2.5	2.5	5.13	0.25 x 0.625	
50	3	4	2.5	2.5	2.5	5.13	0.25 x 0.625	
100	3	4	2.5	2.5	3	5.75	0.25 x 0.625	
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625	
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625	
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625	
300	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625	
350	5.25	5	4.38	4.5	3.75	4.75	0.31 x 0.625	
400	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
450	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
500	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
550	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
600	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
650	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
700	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
800	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
850	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
900	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
950	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1100	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1200	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1300	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1400	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1500	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1600	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1700	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1800	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
1900	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
2000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
2200	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
2400	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
2600	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
2800	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
3000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
3200	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
3400	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
3600	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
3800	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
4000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
4200	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
4400	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
4600	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
4800	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	
5000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625	

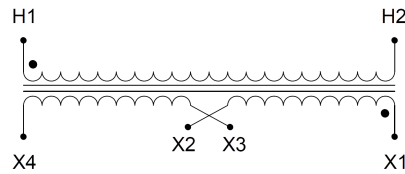

Single Phase Control Transformer with a capacity of 50VA, transforming 480 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	14 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	480
Primary Max Current	0.1A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	0.21A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
50VA 480 VOLTS TO 240/480 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	50
Country/Manufacturer	Canada/RPM