



## 25VA 120/240 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$107.38 CAD**



Single Phase Control Transformer with a capacity of 25VA, transforming 120/240 Volts to 12/24 Volts

SKU: CS25K-Z

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers - Table of Dimensions (inches)									
VA Rating	Overall Dimensions					Mounting		Mounting	
	A	B	C	D	E	Flange	Flange	Flange	Flange
25	3	3	2.5	2.5	2.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
50	3	3	2.5	2.5	2.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
100	3	4	2.5	2.5	3	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	0.118	0.25 x 0.625	0.25 x 0.625	0.25 x 0.625
300	4.5	5	3.75	3.75	3.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
350	5.25	5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
400	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
450	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
500	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
550	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
600	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
650	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
700	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
750	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
800	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
850	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
900	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
950	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1000	5.25	5.5	4.38	4.5	4.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
1500	6.75	7.25	5.63	5	5.75	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
2000	7.5	7.5	6.25	6	6.25	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
3000	7.5	8.75	6.25	6	6.5	0.118	0.31 x 0.625	0.31 x 0.625	0.31 x 0.625
5000	9	10	8	7	8	0.44	0.625 x 0.625	0.625 x 0.625	0.625 x 0.625

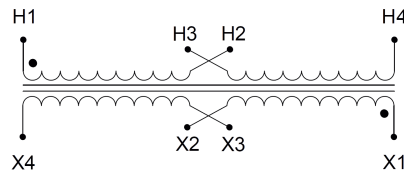

Single Phase Control Transformer with a capacity of 25VA, transforming 120/240 Volts to 12/24 Volts



## PRODUCT SPECIFICATIONS

Weight	12 lbs
Phases	<a href="#">1</a>
Connection	<a href="#">1Ph-CT-DD-SD</a>
Primary Voltage	<a href="#">120/240</a>
Primary Max Current	<a href="#">0.21A</a>
Primary Markings	<a href="#">H1-H2-H3-H4</a>
Primary Terminals	<a href="#">Terminals</a>
Secondary Voltage	<a href="#">12/24</a>
Secondary Max Current	<a href="#">2.08A</a>
Secondary Markings	<a href="#">X1-X2-X3-X4</a>
Secondary Terminals	<a href="#">Terminals</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Temperature Rise	<a href="#">80°C</a>
Insulation Class	<a href="#">130°C (Class B)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">Core &amp; Coil</a>
Enclosure Size	<a href="#">See Core &amp; Coil Chart</a>
Finish/Colour	<a href="#">N/A</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

25VA 120/240 VOLTS TO 12/24  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER



VA	
Country/Manufacturer	<a href="#">Canada/RPM</a>