



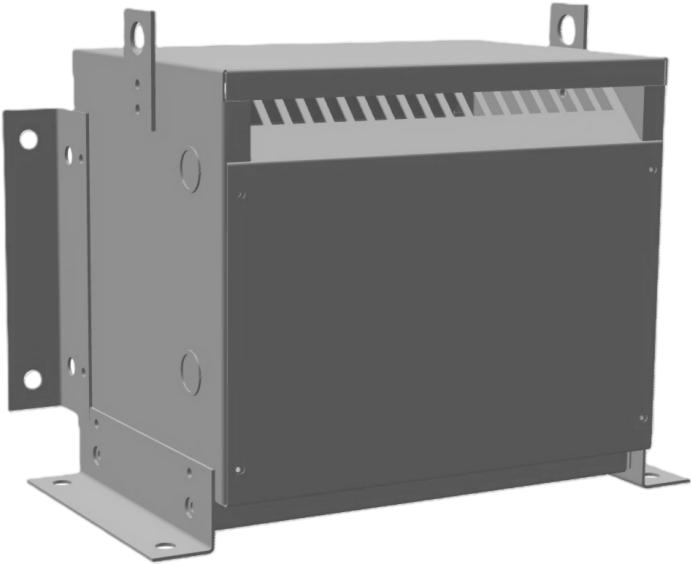


# BC3J-M

## \$1,648.00 CAD


SKU: 6d5e7af9ccf6  
Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

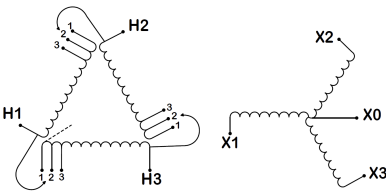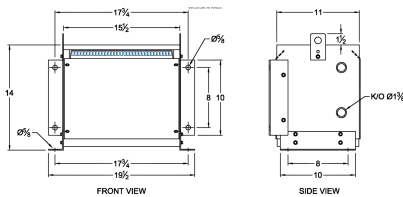

### PRODUCT SPECIFICATIONS

|                     |                                 |
|---------------------|---------------------------------|
| Weight              | 80 lbs                          |
| Phases              | <a href="#">3</a>               |
| kVA                 | <a href="#">3</a>               |
| Connection          | <a href="#">3Ph-DY-3T-SD</a>    |
| Primary Voltage     | <a href="#">600</a>             |
| Primary Max Current | <a href="#">2.9A</a>            |
| Primary Markings    | <a href="#">H1-H2-H3</a>        |
| Primary Terminals   | <a href="#">Terminal Blocks</a> |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Secondary Voltage          | <a href="#">208Y/120</a>                                                                             |
| Secondary Max Current      | <a href="#">8.3A</a>                                                                                 |
| Secondary Markings         | <a href="#">X0-X1-X2-X3</a>                                                                          |
| Secondary Terminals        | <a href="#">Terminal Blocks</a>                                                                      |
| Primary Taps               | <a href="#">+/- 1 x 5%</a>                                                                           |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insuation Class            | <a href="#">180°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Impedance                  | <a href="#">5.5 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 1</a>                                                                               |
| Enclosure                  | <a href="#">E1-3</a>                                                                                 |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |