


OFFICIAL QUOTE

MP3C9H-M/BO/CLC



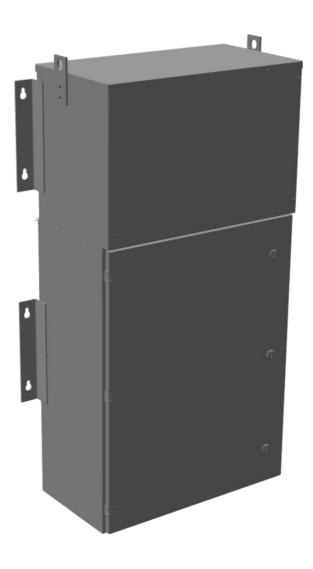


MP3C9H-M/BO/CLC


\$8,954.00 USD

SKU: 9751dfb29ca8

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE MP3C9H-M/BO/CLC



PRODUCT SPECIFICATIONS

| Wataka | 215 lb a |
|-----------------------------|--|
| Weight | 315 lbs |
| Phases | 3 |
| Circuit Breaker Suitability | Eaton Type BAB |
| kVA | 9 |
| Connection | MPC3P-3t |
| Incoming Voltage | 480 |
| Primary Breaker | 25A |
| Interruping Rating | 14kAIC @ 480V |
| Output Voltage | <u>208Y/120</u> |
| Secondary Breaker | <u>30A</u> |
| Short Circuit Withstand | 10kAIC @ 240V |
| Primary Taps | <u>+/- 1 x 5%</u> |
| Conductor Material | Copper |
| Insuation Class | 200°C |
| Panel Board | Bolt-On |
| Load Center Bus Material | <u>Copper</u> |
| # of Circuits | 18 |
| Impedance | <u>1.5 - 3.0%</u> |
| Temperatue Rise | 130°C |
| Enclosure | E3R-3PMPC-1B |
| Enclosure Type | E3R Outdoor |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, ISO 9001:2015 Registered |