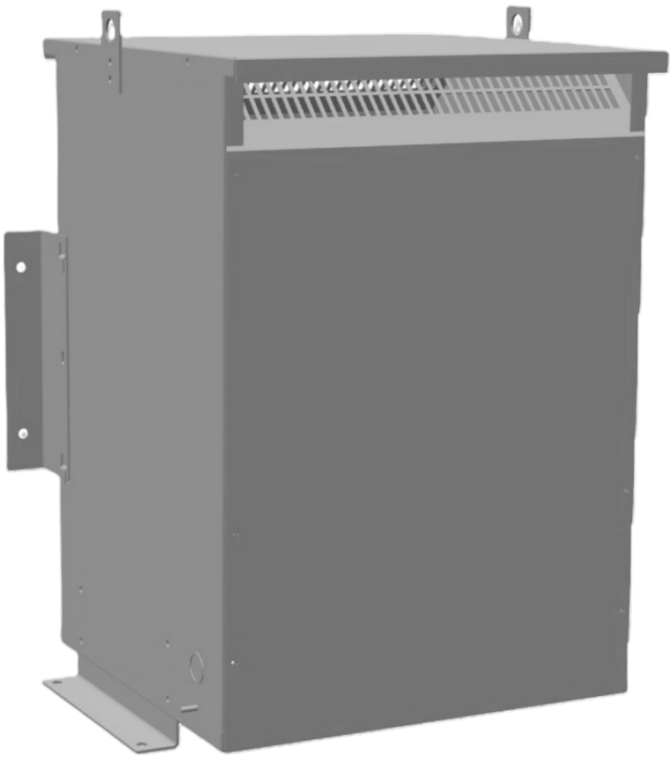

# BA45J-M/Z3

## $3,777.35 USD

**SKU:** 8c2df5485315
**Categories:** Isolation Transformers

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

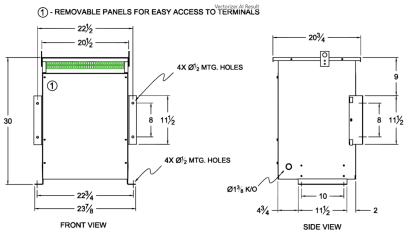


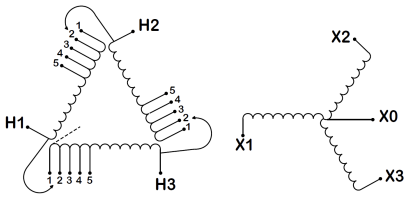


### PRODUCT SPECIFICATIONS

| | |
|---|---|
| **Weight** | 390 lbs |
| **Phases** | 3 |
| **kVA** | 45 |
| **Connection** | 3Ph-DY-5T-SD |
| **Primary Voltage** | 600 |

| | |
|---|---|
| **Primary Max Current** | 43.3A |
| **Primary Markings** | H1-H2-H3 |
| **Primary Terminals** | #2-14 AWG |
| **Secondary Voltage** | 208Y/120 |
| **Secondary Max Current** | 124.9A |
| **Secondary Markings** | X1-X3-X2-X4 |
| **Secondary Terminals** | 300MCM-6 |
| **Primary Taps** | +/- 2 x 2.5% |
| **Conductor Material** | Aluminum |
| **Insuation Class** | 220°C |
| **BIL (Insulation) Level** | 10kV |
| **Impedance** | 4.0 – 6.0% |
| **Sound (db)** | 45 |
| **Enclosure Type** | NEMA 3R Indoor |
| **Enclosure** | E3R-6 |
| **Finish** | Polyster Powder Coat – ANSI/ASA 61 Grey |
| **Standards & Certifications** | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| **Efficiency** | 98.40% |