


#### **OFFICIAL QUOTE**

## 15KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER



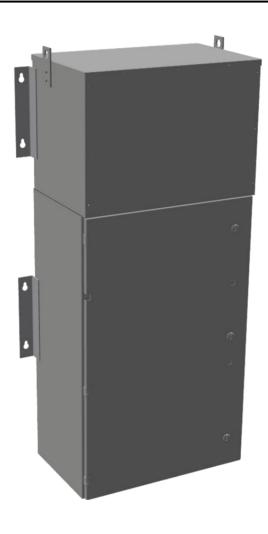


# 15KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER


\$10,659.00 CAD

SKU: MP1A15J-K/BO/CLC

Categories: Mini Power Centers

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**







### **OFFICIAL QUOTE**



## 15KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

### **PRODUCT SPECIFICATIONS**

| Weight                      | 375 lbs  |
|-----------------------------|--|
| Phases                      | 1  |
| kVA                         | <u>15</u>  |
| Connection                  | MPC1P-5t   |
| Primary Taps                | +/- 2 x 2.5%   |
| Conductor Material          | Aluminum   |
| BIL (Insulation) Level      | <u>10kV</u>  |
| Impedance Range             | <u>1.5 – 3.0%</u>  |
| Enclosure Type              | NEMA 3R Outdoor  |
| Enclosure Size              | E3R-1PMPC-2B   |
| Finish/Colour               | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications  | CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered |
| Incoming Voltage            | 600  |
| Primary Breaker             | 60A  |
| Interruping Rating          | 14kAIC @ 600V  |
| Output Voltage              | 120/240  |
| Secondary Breaker           | 70A  |
| Short Circuit Withstand     | 10kAIC @ 240V  |
| Panel Board                 | Bolt-On  |
| Load Center Bus Material    | <u>Copper</u>  |
| # of Circuits               | 30   |
| Circuit Breaker Suitability | Eaton Type BAB   |
| Temperatue Rise             | 130°C  |
| Insuation Class             | 200°C (Class N)  |



### **OFFICIAL QUOTE**



## 15KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

| Country/Manufacturer | Canada/RPM |
|----------------------|------------|