


OFFICIAL QUOTE

15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER



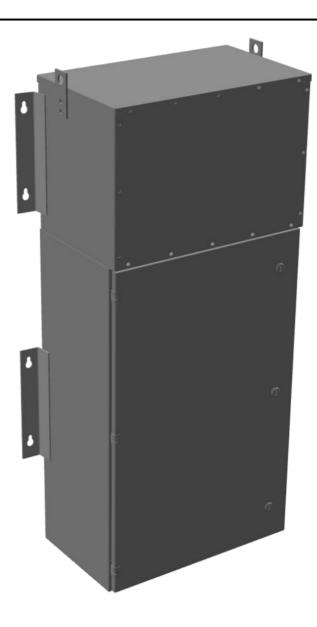


15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER


\$10,738.00 CAD

SKU: MP3C15H-M

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE



15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	475 lbs	
Phases	3	
kVA	15	
Connection	MPC3P-5t	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Copper	
BIL (Insulation) Level	10kV	
Impedance Range	<u>1.5 - 3.0%</u>	
Enclosure Type	NEMA 3R Outdoor	
Enclosure Size	E3R-3PMPC-2	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered	
Incoming Voltage	480	
Primary Breaker	40A	
Interruping Rating	14kAIC @ 480V	
Output Voltage	<u>208Y/120</u>	
Secondary Breaker	<u>50A</u>	
Short Circuit Withstand	10kAIC @ 240V	
Panel Board	Push-On	
Load Center Bus Material	<u>Aluminum</u>	
# of Circuits	27	
Circuit Breaker Suitability	Eaton Type BR	
Temperatue Rise	130°C	



OFFICIAL QUOTE



15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

- I	nsuation Class	200°C (Class N)
(Country/Manufacturer	<u>Canada/RPM</u>