




# OFFICIAL QUOTE



**15KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE PUSH-ON  
BREAKER MINI POWER CENTER**

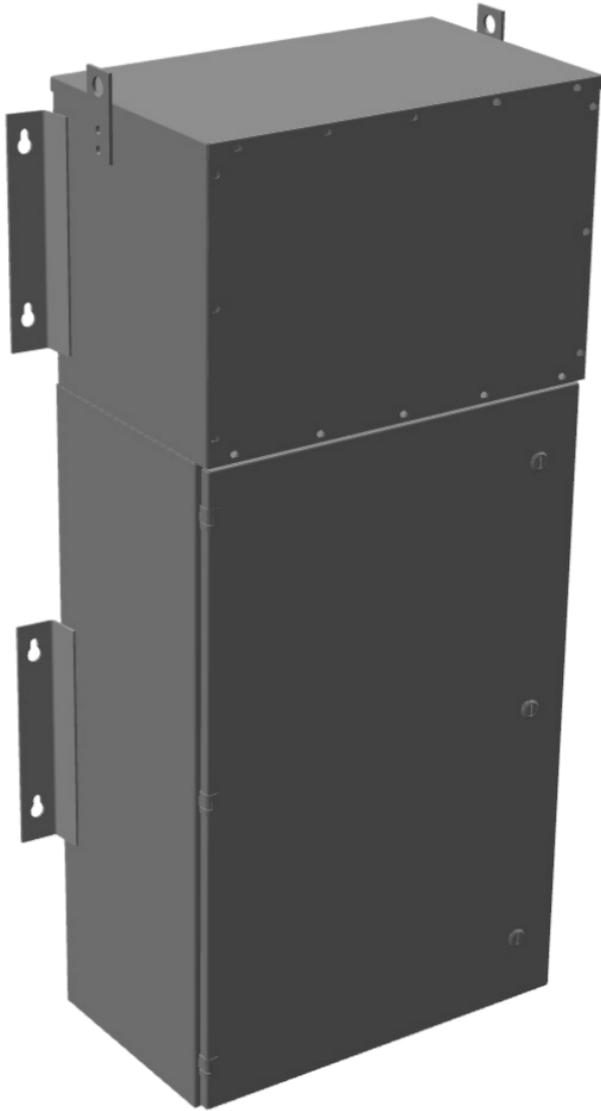



## 15KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

**\$10,738.00 CAD**

SKU: MP3C15H-M

Categories: [Mini Power Centers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





## OFFICIAL QUOTE



**15KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE PUSH-ON  
BREAKER MINI POWER CENTER**

### PRODUCT SPECIFICATIONS

|                                       |  |
|---------------------------------------|--|
| <b>Weight</b>                         | 475 lbs  |
| <b>Phases</b>                         | <a href="#">3</a>  |
| <b>kVA</b>                            | <a href="#">15</a>   |
| <b>Connection</b>                     | <a href="#">MPC3P-5t</a>   |
| <b>Primary Taps</b>                   | <a href="#">+/- 2 x 2.5%</a>   |
| <b>Conductor Material</b>             | <a href="#">Copper</a>   |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Impedance Range</b>                | <a href="#">1.5 – 3.0%</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Outdoor</a>  |
| <b>Enclosure Size</b>                 | <a href="#">E3R-3PMPC-2</a>  |
| <b>Finish/Colour</b>                  | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>   |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a> |
| <b>Incoming Voltage</b>               | <a href="#">480</a>  |
| <b>Primary Breaker</b>                | <a href="#">40A</a>  |
| <b>Interrupting Rating</b>            | <a href="#">14kAIC @ 480V</a>  |
| <b>Output Voltage</b>                 | <a href="#">208Y/120</a>   |
| <b>Secondary Breaker</b>              | <a href="#">50A</a>  |
| <b>Short Circuit Withstand</b>        | <a href="#">10kAIC @ 240V</a>  |
| <b>Panel Board</b>                    | <a href="#">Push-On</a>  |
| <b>Load Center Bus Material</b>       | <a href="#">Aluminum</a>   |
| <b># of Circuits</b>                  | <a href="#">27</a>   |
| <b>Circuit Breaker Suitability</b>    | <a href="#">Eaton Type BR</a>  |
| <b>Temperatue Rise</b>                | <a href="#">130°C</a>  |



**OFFICIAL QUOTE**



**15KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE PUSH-ON  
BREAKER MINI POWER CENTER**

|                             |                                 |
|-----------------------------|---------------------------------|
| <b>Insuation Class</b>      | <a href="#">200°C (Class N)</a> |
| <b>Country/Manufacturer</b> | <a href="#">Canada/RPM</a>      |