


OFFICIAL QUOTE

30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER



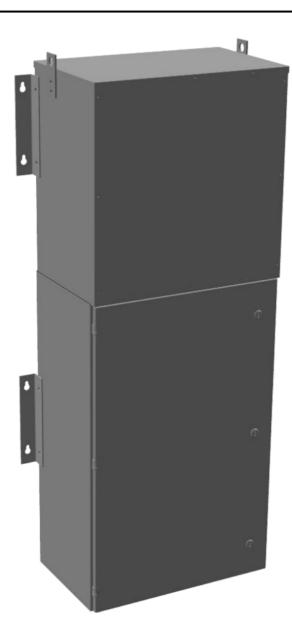


30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER


\$15,179.00 CAD

SKU: MP1C30J-K/BO/CLC

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE



30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

PRODUCT SPECIFICATIONS

| Weight | 780 lbs |
|-----------------------------|--|
| Phases | 1 |
| kVA | 30 |
| Connection | MPC1P-5t |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | 10kV |
| Impedance Range | 1.5 - 3.0% |
| Enclosure Type | NEMA 3R Outdoor |
| Enclosure Size | E3R-1PMPC-3B |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered |
| Incoming Voltage | 600 |
| Primary Breaker | 100A |
| Interruping Rating | 14kAIC @ 600V |
| Output Voltage | 120/240 |
| Secondary Breaker | 150A |
| Short Circuit Withstand | 25kAIC @ 240V |
| Panel Board | Bolt-On |
| Load Center Bus Material | Copper |
| # of Circuits | 30 |
| Circuit Breaker Suitability | Eaton Type BAB |
| Temperatue Rise | 130°C |



OFFICIAL QUOTE



30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

| - | Insuation Class | 200°C (Class N) | |
|---|----------------------|-------------------|--|
| | Country/Manufacturer | <u>Canada/RPM</u> | |