


#### **OFFICIAL QUOTE**

## 330KVA 480 VOLTS TO 220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



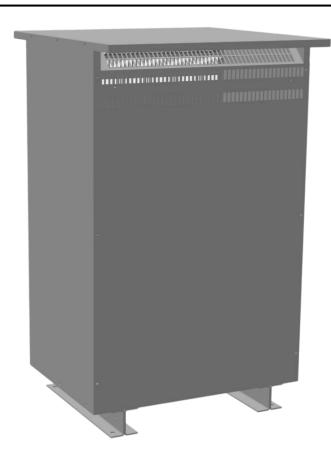

# 330KVA 480 VOLTS TO 220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$24,231.48 CAD

Single Phase Isolation Transformer with a capacity of 330kVA, transforming 480 Volts to 220 Volts

**SKU:** SC330H-C2/Z3

**Categories:** <u>Isolation Transformers</u>

## **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Isolation Transformer with a capacity of 330kVA, transforming 480 Volts to 220 Volts



### **OFFICIAL QUOTE**



# 330KVA 480 VOLTS TO 220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |  |
|----------------------------|--|--|
| Weight                     | 1720 lbs   |  |
| Phases                     | 1  |  |
| kVA                        | 330  |  |
| Connection                 | 1Ph-2coil-5t-SD  |  |
| Primary Voltage            | 480  |  |
| Primary Max Current        | <u>687.5A</u>  |  |
| Primary Markings           | <u>H1-H2</u>   |  |
| Primary Terminals          | <u>Pads</u>  |  |
| Secondary Voltage          | 220  |  |
| Secondary Max Current      | 1500.0A  |  |
| Secondary Markings         | <u>X1-X2</u>   |  |
| Secondary Terminals        | <u>Pads</u>  |  |
| Primary Taps               | +/- 2 x 2.5%   |  |
| Conductor Material         | Copper   |  |
| BIL (Insulation) Level     | <u>10kV</u>  |  |
| Efficiency (@35% Load) %   | 98.90% (DOE 2016/NRCan 2019)   |  |
| Impedance Range            | 4.0 - 6.0%   |  |
| Sound (db)                 | <u>55</u>  |  |
| Enclosure Type             | NEMA 3R Indoor   |  |
| Enclosure Size             | <u>E3R-9S</u>  |  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |  |
| Temperatue Rise            | 150°C  |  |



### **OFFICIAL QUOTE**



# 330KVA 480 VOLTS TO 220 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

| Insuation Class      | 150°C                                    |
|----------------------|--|
| Country/Manufacturer | Canada/RPM                               |
| Finish/Colour        | Polyester Powder Coat - ANSI/ASA 61 Grey |