


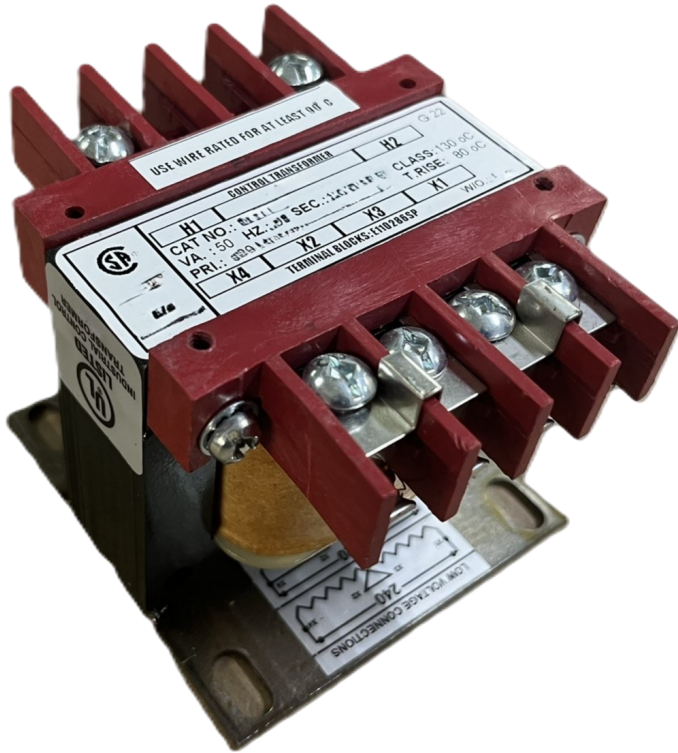

## 50VA 600 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$94.64 CAD**



Single Phase Control Transformer with a capacity of 50VA, transforming 600 Volts to 12/24 Volts

SKU: CS50H-Z

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| Control Transformers: Table of Dimensions (Inches) |                    |      |      |                  |      |               |
|----------------------------------------------------|--------------------|------|------|------------------|------|---------------|
| VA                                                 | Overall Dimensions |      |      | Mounting Centres |      | Mounting Slot |
| Rating                                             | A                  | B    | C    | D                | E    | F             |
| 25                                                 | 3                  | 3    | 2.5  | 2.5              | 5.13 | 0.25 x 0.625  |
| 50                                                 | 3                  | 4    | 2.5  | 2.5              | 5.13 | 0.25 x 0.625  |
| 100                                                | 3                  | 4    | 2.5  | 2.5              | 5.13 | 0.25 x 0.625  |
| 150                                                | 3.75               | 4.25 | 3.13 | 3.25             | 5.5  | 0.25 x 0.625  |
| 200                                                | 3.75               | 4.5  | 3.13 | 3.25             | 5.5  | 0.25 x 0.625  |
| 250                                                | 3.75               | 5    | 3.13 | 3.25             | 5.5  | 0.31 x 0.625  |
| 350                                                | 4.5                | 5    | 3.75 | 3.75             | 4.75 | 0.31 x 0.625  |
| 500                                                | 5.25               | 5    | 4.38 | 4.5              | 4.75 | 0.31 x 0.625  |
| 750                                                | 5.25               | 5.5  | 4.38 | 4.5              | 5.75 | 0.31 x 0.625  |
| 1000                                               | 5.25               | 6.5  | 4.38 | 4.5              | 5.75 | 0.31 x 0.625  |
| 1500                                               | 6.75               | 7.25 | 5.63 | 5                | 5.25 | 0.31 x 0.625  |
| 2000                                               | 7.5                | 7.5  | 6.25 | 6                | 5.25 | 0.31 x 0.625  |
| 3000                                               | 7.5                | 8.75 | 6.25 | 6                | 5.5  | 0.31 x 0.625  |
| 5000                                               | 9                  | 10   | 8    | 7                | 8    | 0.44 x 0.625  |

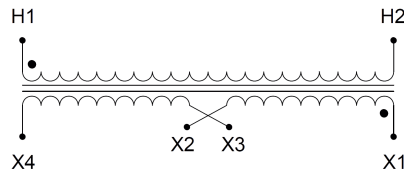

Single Phase Control Transformer with a capacity of 50VA, transforming 600 Volts to 12/24 Volts



## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 3 lbs                                                                                                |
| Phases                     | <a href="#">1</a>                                                                                    |
| Connection                 | <a href="#">1Ph-CT-SD-SD</a>                                                                         |
| Primary Voltage            | <a href="#">600</a>                                                                                  |
| Primary Max Current        | <a href="#">0.08A</a>                                                                                |
| Primary Markings           | <a href="#">H1-H2</a>                                                                                |
| Primary Terminals          | <a href="#">Terminals</a>                                                                            |
| Secondary Voltage          | <a href="#">12/24</a>                                                                                |
| Secondary Max Current      | <a href="#">4.17A</a>                                                                                |
| Secondary Markings         | <a href="#">X1-X2-X3-X4</a>                                                                          |
| Secondary Terminals        | <a href="#">Terminals</a>                                                                            |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">80°C</a>                                                                                 |
| Insuation Class            | <a href="#">130°C (Class B)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure Size             | <a href="#">See Core &amp; Coil Chart</a>                                                            |
| Finish/Colour              | <a href="#">N/A</a>                                                                                  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE  
50VA 600 VOLTS TO 12/24 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| VA                   | <a href="#">50</a>         |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |