


OFFICIAL QUOTE

3KVA 277 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER



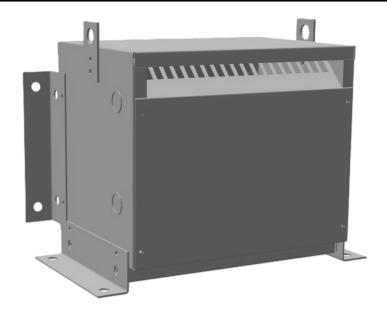

3KVA 277 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,134.42 USD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 277 Volts to 240Y/139 Volts

SKU: BC3D-S

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 277 Volts to 240Y/139 Volts



OFFICIAL QUOTE



3KVA 277 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	73 lbs
Phases	<u>3</u>
kVA	<u>3</u>
Connection	3Ph-DY-3T-SD
Primary Voltage	277
Primary Max Current	6.25A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	<u>240Y/139</u>
Secondary Max Current	7.22A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 – 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	115°C



OFFICIAL QUOTE



3KVA 277 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey