


OFFICIAL QUOTE

30VA 110 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER



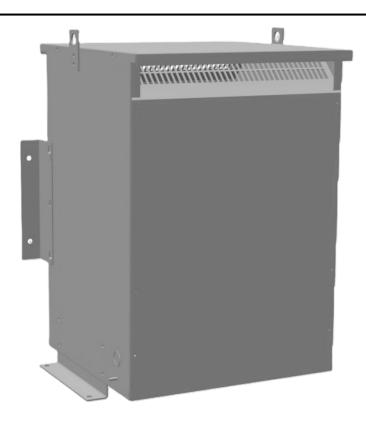

30VA 110 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$4,445.28 CAD


Three Phase Isolation Transformer with a capacity of 30kVA, transforming 110 Volts to 550Y/318 Volts

SKU: BA30A2-Q2/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 30kVA, transforming 110 Volts to 550Y/318 Volts



OFFICIAL QUOTE



30VA 110 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	298 lbs
Phases	3
kVA	30
Connection	3Ph-DY-5T-SU
Primary Voltage	110
Primary Max Current	<u>157.46A</u>
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>300 MCM – 6</u>
Secondary Voltage	<u>550Y/318</u>
Secondary Max Current	31.49A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	<u>300 MCM – 6</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.23% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



30VA 110 VOLTS TO 550Y/318 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey