


**OFFICIAL QUOTE** 

30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER



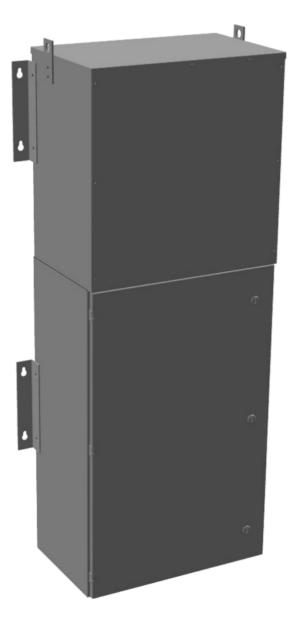



# 30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

\$15,179.00 CAD

SKU: MP1C30J-K/BO/CLC Categories: <u>Mini Power Centers</u>

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





The quote is valid 30 days from 8 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



**OFFICIAL QUOTE** 

## 30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER **MINI POWER CENTER**



#### **PRODUCT SPECIFICATIONS**

Weight	780 lbs
Phases	1
kVA	<u>30</u>
Connection	MPC1P-5t
Primary Taps	<u>+/- 2 x 2.5%</u>
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Impedance Range	<u>1.5 – 3.0%</u>
Enclosure Type	NEMA 3R Outdoor
Enclosure Size	E3R-1PMPC-3B
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
Incoming Voltage	<u>600</u>
Primary Breaker	<u>100A</u>
Interruping Rating	<u>14kAIC @ 600V</u>
Output Voltage	<u>120/240</u>
Secondary Breaker	<u>150A</u>
Short Circuit Withstand	25kAIC @ 240V
Panel Board	Bolt-On
Load Center Bus Material	<u>Copper</u>
# of Circuits	<u>30</u>
Circuit Breaker Suitability	Eaton Type BAB
Temperatue Rise	<u>130°C</u>

The quote is valid 30 days from 8 June 2025. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



**OFFICIAL QUOTE** 

## 30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER



Insuation Class	200°C (Class N)	ŀ
Country/Manufacturer	Canada/RPM	