




**45KVA 575 VOLTS TO 600 VOLTS
THREE PHASE AUTOTRANSFORMER**

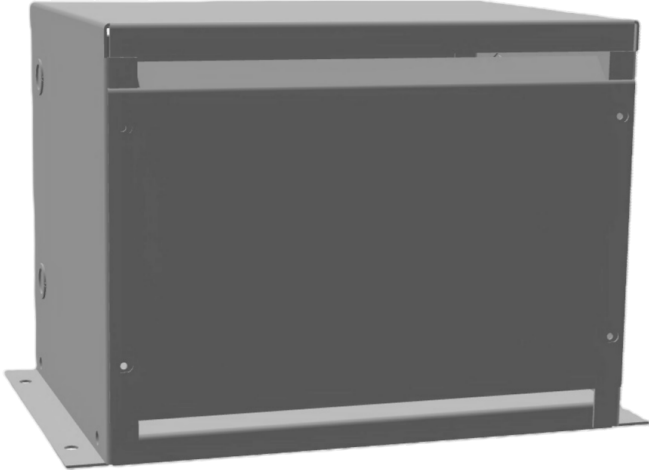

**45KVA 575 VOLTS TO 600
VOLTS THREE PHASE
AUTOTRANSFORMER**



\$1,372.50 CAD

Three Phase Autotransformer with a capacity of 45kVA, transforming 575Y Volts to 600Y Volts

SKU: RC45J1-J

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

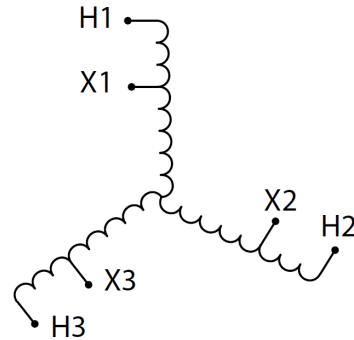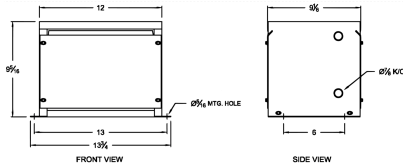

Three Phase Autotransformer with a capacity of 45kVA, transforming 575Y Volts to 600Y Volts



PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	3
kVA	45
Connection	3PhA-NT-1
Primary Voltage	575
Primary Max Current	45.2A
Primary Markings	X1-X2-X3
Primary Terminals	#2-14 AWG
Secondary Voltage	600
Secondary Max Current	43.3A
Secondary Markings	H1-H2-H3
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

45KVA 575 VOLTS TO 600 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------