




# OFFICIAL QUOTE

## 30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

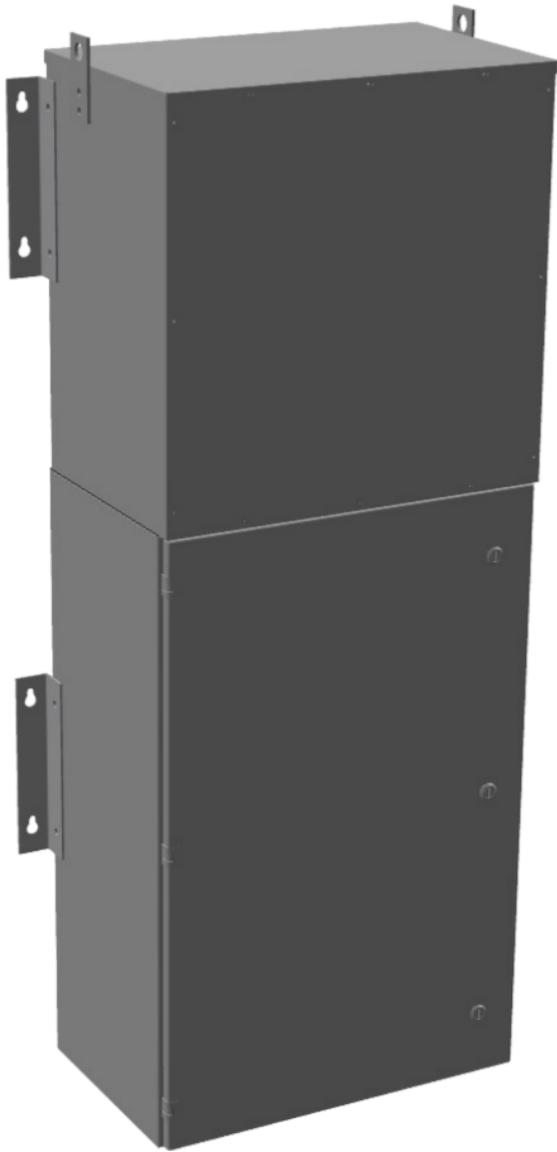


# 30KVA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE BOLT-ON BREAKER MINI POWER CENTER

## \$15,179.00 CAD


SKU: MP1C30J-K/BO/CLC

Categories: [Mini Power Centers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



| Ref          | A     | B    | C  | D    | E    | F | G    | H     |
|--------------|-------|------|----|------|------|---|------|-------|
| Dim (Inches) | 23.25 | 14.5 | 60 | 23.6 | 36.5 | 8 | 26.5 | 25.38 |



The quote is valid 30 days from 13 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to [sales@transformersource.ca](mailto:sales@transformersource.ca). Printed: September-16-2024.



OFFICIAL QUOTE

30KVA 600 VOLTS TO 120/240 VOLTS  
SINGLE PHASE BOLT-ON BREAKER  
MINI POWER CENTER



PRODUCT SPECIFICATIONS

|                             |  |
|-----------------------------|--|
| Weight                      | 780 lbs  |
| Phases                      | <a href="#">1</a>  |
| kVA                         | <a href="#">30</a>   |
| Connection                  | <a href="#">MPC1P-5t</a>   |
| Primary Taps                | <a href="#">+/- 2 x 2.5%</a>   |
| Conductor Material          | <a href="#">Copper</a>   |
| BIL (Insulation) Level      | <a href="#">10kV</a>   |
| Impedance Range             | <a href="#">1.5 – 3.0%</a>   |
| Enclosure Type              | <a href="#">NEMA 3R Outdoor</a>  |
| Enclosure Size              | <a href="#">E3R-1PMPC-3B</a>   |
| Finish/Colour               | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>   |
| Standards & Certifications  | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a> |
| Incoming Voltage            | <a href="#">600</a>  |
| Primary Breaker             | <a href="#">100A</a>   |
| Interrupting Rating         | <a href="#">14kAIC @ 600V</a>  |
| Output Voltage              | <a href="#">120/240</a>  |
| Secondary Breaker           | <a href="#">150A</a>   |
| Short Circuit Withstand     | <a href="#">25kAIC @ 240V</a>  |
| Panel Board                 | <a href="#">Bolt-On</a>  |
| Load Center Bus Material    | <a href="#">Copper</a>   |
| # of Circuits               | <a href="#">30</a>   |
| Circuit Breaker Suitability | <a href="#">Eaton Type BAB</a>   |
| Temperatue Rise             | <a href="#">130°C</a>  |



OFFICIAL QUOTE

30KVA 600 VOLTS TO 120/240 VOLTS  
SINGLE PHASE BOLT-ON BREAKER  
MINI POWER CENTER



|                      |                                 |
|----------------------|---------------------------------|
| Insuation Class      | <a href="#">200°C (Class N)</a> |
| Country/Manufacturer | <a href="#">Canada/RPM</a>      |