


OFFICIAL QUOTE

SA15B-K/Z3



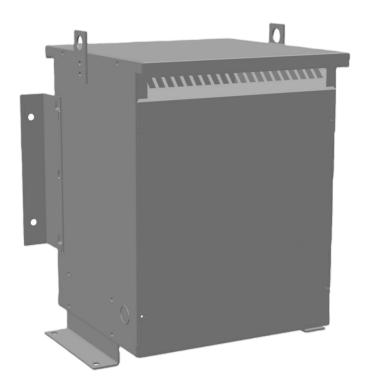


SA15B-K/Z3


\$1,395.61 USD

SKU: e2ab568e7c36

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 145 lbs |
|---------------------|-----------------|
| Phases | 1 |
| kVA | <u>15</u> |
| Connection | 1Ph-2coil-5t-SD |
| Primary Voltage | 208 |
| Primary Max Current | 72.1A |
| Primary Markings | <u>H1-H2</u> |



OFFICIAL QUOTE

SA15B-K/Z3



| Primary Terminals | #2-14 AWG |
|----------------------------|--|
| Secondary Voltage | 120/240 |
| Secondary Max Current | 125A |
| Secondary Markings | <u>X1-X3-X2-X4</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Aluminum |
| Insuation Class | 220°C |
| BIL (Insulation) Level | <u>10kV</u> |
| Impedance | 4.0 - 6.0% |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-4</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | 97.70% |