



OFFICIAL QUOTE




9KVA 480 VOLTS TO 208Y/120 VOLTS
THREE PHASE BOLT-ON BREAKER
MINI POWER CENTER

9KVA 480 VOLTS TO
208Y/120 VOLTS THREE
PHASE BOLT-ON BREAKER
MINI POWER CENTER


\$12,158.00 CAD

SKU: MP3C9H-M/BO/CLC


Categories: [Mini Power Centers](#)

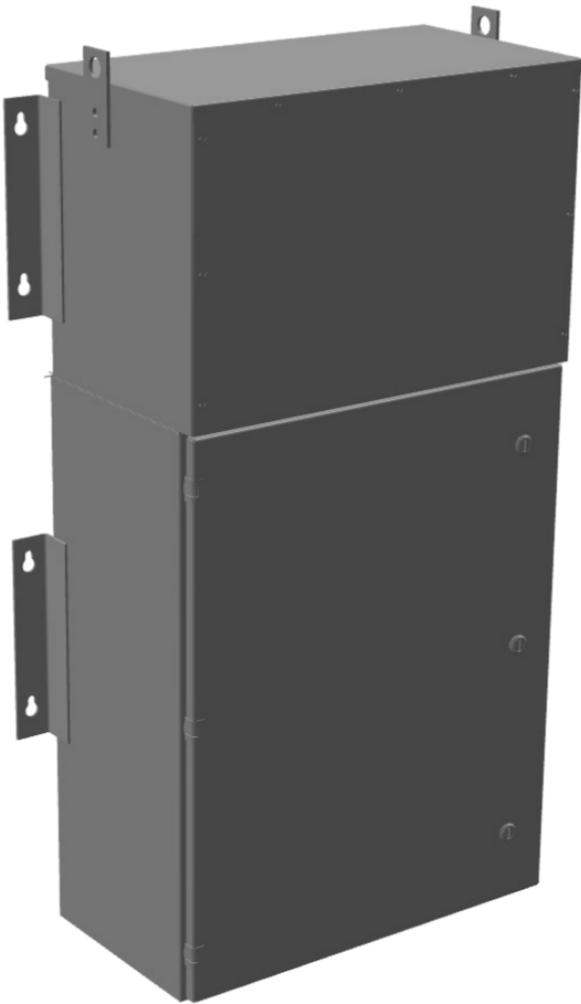

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



Ref	A	B	C	D	E	F	G	H
Dim (inches)	23.25	12.5	45.5	15.6	30	8	14.5	25.25





OFFICIAL QUOTE

9KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER



PRODUCT SPECIFICATIONS

Weight	315 lbs
Phases	3
kVA	9
Connection	MPC3P-3t
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Impedance Range	1.5 – 3.0%
Enclosure Type	NEMA 3R Outdoor
Enclosure Size	E3R-3PMPC-1B
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
Incoming Voltage	480
Primary Breaker	25A
Interrupting Rating	14kAIC @ 480V
Output Voltage	208Y/120
Secondary Breaker	30A
Short Circuit Withstand	10kAIC @ 240V
Panel Board	Bolt-On
Load Center Bus Material	Copper
# of Circuits	18
Circuit Breaker Suitability	Eaton Type BAB
Temperatue Rise	130°C
Insuation Class	200°C (Class N)



OFFICIAL QUOTE



**9KVA 480 VOLTS TO 208Y/120 VOLTS
THREE PHASE BOLT-ON BREAKER
MINI POWER CENTER**

Country/Manufacturer

[Canada/RPM](#)