


OFFICIAL QUOTE

225KVA 550 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



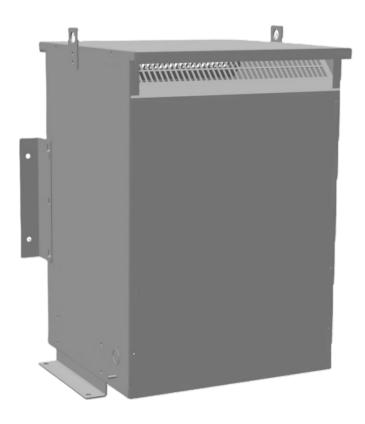

225KVA 550 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$5,873.40 CAD


Single Phase Autotransformer with a capacity of 225kVA, transforming 550 Volts to 440 Volts

SKU: MC225J2-H2

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 225kVA, transforming 550 Volts to 440 Volts



OFFICIAL QUOTE



225KVA 550 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	401.1 lbs
Phases	1
kVA	225
Connection	<u>1PhA-NT-1</u>
Primary Voltage	<u>550</u>
Primary Max Current	236.2A
Primary Markings	<u>H0-H1</u>
Primary Terminals	600MCM-2
Secondary Voltage	440
Secondary Max Current	<u>295.2A</u>
Secondary Markings	<u>X0-X1</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	<u>45 dB</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

225KVA 550 VOLTS TO 440 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------