


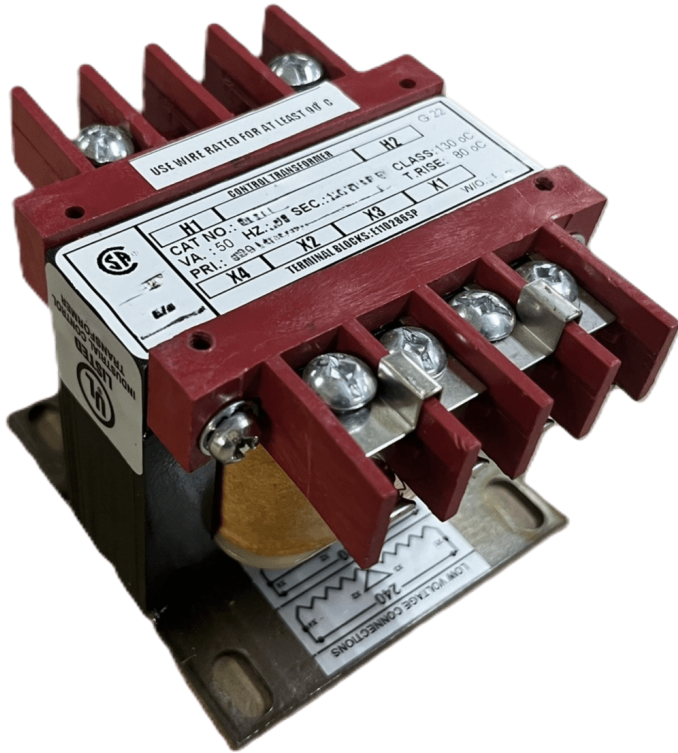

## 75VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$125.58 CAD**



Single Phase Control Transformer with a capacity of 75VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS75K-L

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| Control Transformers, Table of Dimensions (inches) |      |      |      |      |      |              |
|----------------------------------------------------|------|------|------|------|------|--------------|
| VA Rating                                          | A    | B    | C    | D    | E    | F            |
| 25                                                 | 3    | 3    | 2.5  | 2.5  | 3.13 | 0.25 x 0.025 |
| 50                                                 | 3    | 3    | 2.5  | 2.5  | 3.13 | 0.25 x 0.025 |
| 75                                                 | 3    | 4    | 2.5  | 2.5  | 3    | 0.25 x 0.025 |
| 100                                                | 3    | 4    | 2.5  | 2.5  | 3    | 0.25 x 0.025 |
| 150                                                | 3.75 | 4.25 | 3.13 | 3.25 | 3.5  | 0.25 x 0.025 |
| 200                                                | 3.75 | 4.5  | 3.13 | 3.25 | 3.5  | 0.25 x 0.025 |
| 250                                                | 3.75 | 5    | 3.13 | 3.25 | 3.5  | 0.31 x 0.025 |
| 350                                                | 4.5  | 5    | 3.75 | 3.75 | 4.75 | 0.31 x 0.025 |
| 500                                                | 5.25 | 5    | 4.38 | 4.5  | 5.75 | 0.31 x 0.025 |
| 750                                                | 5.25 | 5.5  | 4.38 | 4.5  | 5.75 | 0.31 x 0.025 |
| 1000                                               | 5.25 | 6.5  | 4.38 | 4.5  | 5.75 | 0.31 x 0.025 |
| 1500                                               | 6.75 | 7.25 | 5.63 | 5    | 5.75 | 0.31 x 0.025 |
| 2000                                               | 7.5  | 7.5  | 6.25 | 6    | 4.25 | 0.31 x 0.025 |
| 3000                                               | 7.5  | 8.75 | 6.25 | 6    | 5.5  | 0.31 x 0.025 |
| 5000                                               | 9    | 10   | 8    | 7    | 7    | 0.44 x 0.025 |

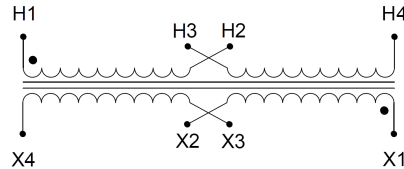

Single Phase Control Transformer with a capacity of 75VA, transforming 120/240 Volts to 240/480 Volts



## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 14 lbs                                                                                               |
| Phases                     | <a href="#">1</a>                                                                                    |
| Connection                 | <a href="#">1Ph-CT-DD-SU</a>                                                                         |
| Primary Voltage            | <a href="#">120/240</a>                                                                              |
| Primary Max Current        | <a href="#">0.63A</a>                                                                                |
| Primary Markings           | <a href="#">X1-X2-X3-X4</a>                                                                          |
| Primary Terminals          | <a href="#">Terminals</a>                                                                            |
| Secondary Voltage          | <a href="#">240/480</a>                                                                              |
| Secondary Max Current      | <a href="#">0.31A</a>                                                                                |
| Secondary Markings         | <a href="#">H1-H2-H3-H4</a>                                                                          |
| Secondary Terminals        | <a href="#">Terminals</a>                                                                            |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperature Rise           | <a href="#">80°C</a>                                                                                 |
| Insulation Class           | <a href="#">130°C (Class B)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure Size             | <a href="#">See Core &amp; Coil Chart</a>                                                            |
| Finish/Colour              | <a href="#">N/A</a>                                                                                  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

75VA 120/240 VOLTS TO 240/480  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| VA                   |                            |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |