


#### **OFFICIAL QUOTE**

### 450KVA 347 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



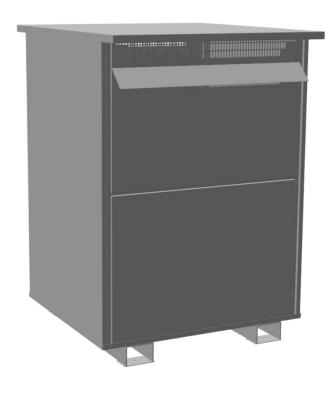

## 450KVA 347 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$47,301.35 CAD

Three Phase Isolation Transformer with a capacity of 450kVA, transforming 347 Volts to 415Y/240 Volts

**SKU:** BC450E-N2/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 450kVA, transforming 347 Volts to 415Y/240 Volts



### **OFFICIAL QUOTE**



# 450KVA 347 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	3350 lbs
Phases	<u>3</u>
kVA	450
Connection	3Ph-DY-5CT-SU
Primary Voltage	347
Primary Max Current	748.73A
Primary Markings	X1-X2-X3
Primary Terminals	<u>Pads</u>
Secondary Voltage	415Y/240
Secondary Max Current	626.04A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	99.11% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



### **OFFICIAL QUOTE**



# 450KVA 347 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey