


#### **OFFICIAL QUOTE**

### 75KVA 415 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



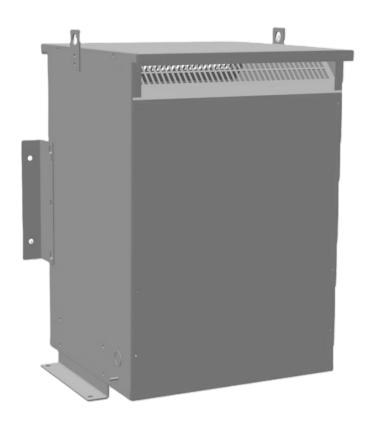

### 75KVA 415 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER


\$3,516.94 USD

Three Phase Autotransformer with a capacity of 75kVA, transforming 415Y Volts to 200Y Volts

**SKU:** RA75G2-B1

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 75kVA, transforming 415Y Volts to 200Y Volts



#### **OFFICIAL QUOTE**



## 75KVA 415 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

#### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 226 lbs  |
| Phases                     | <u>3</u>   |
| kVA                        | <u>75</u>  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 415  |
| Primary Max Current        | 104.3A   |
| Primary Markings           | H1-H2-H3   |
| Primary Terminals          | #2/0-6 AWG   |
| Secondary Voltage          | 200  |
| Secondary Max Current      | 216.5A   |
| Secondary Markings         | <u>X1-X2-X3</u>  |
| Secondary Terminals        | 600MCM-2   |
| Primary Taps               | N/A  |
| Conductor Material         | <u>Aluminum</u>  |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>1.5 – 3.5%</u>  |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-6</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

# 75KVA 415 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|