


OFFICIAL QUOTE

37.5VA 347 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



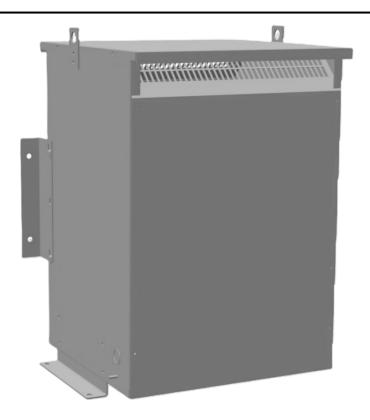

37.5VA 347 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$4,386.48 CAD

Single Phase Isolation Transformer with a capacity of 37.5kVA, transforming 347 Volts to 220/440 Volts

SKU: SC37E-L2/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 37.5kVA, transforming 347 Volts to 220/440 Volts



OFFICIAL QUOTE



37.5VA 347 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	272 lbs
Phases	1
kVA	37.5
Connection	1Ph-2coil-5t-SD
Primary Voltage	347
Primary Max Current	<u>108.07A</u>
Primary Markings	H1-H2
Primary Terminals	<u>Pads</u>
Secondary Voltage	220/440
Secondary Max Current	170.45A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.20% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>150°C</u>



OFFICIAL QUOTE



37.5VA 347 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey