


OFFICIAL QUOTE

1000KVA 416 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



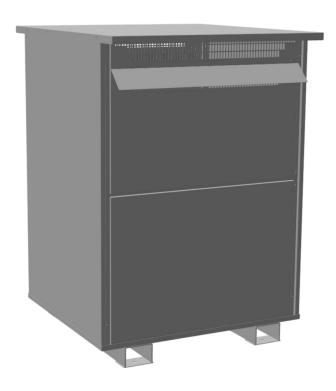

1000KVA 416 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER


\$34,557.60 CAD


Three Phase Autotransformer with a capacity of 1000kVA, transforming 416Y Volts to 208Y Volts

SKU: RA1000G-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES






Three Phase Autotransformer with a capacity of 1000kVA, transforming 416Y Volts to 208Y Volts



OFFICIAL QUOTE





PRODUCT SPECIFICATIONS

| Weight | 3281 lbs |
|----------------------------|--------------------------------------------------------------------------------------|
| Phases | <u>3</u> |
| kVA | 1000 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 416 |
| Primary Max Current | 1387.9A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 208 |
| Secondary Max Current | 2775.7A |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>1.5 – 3.5%</u> |
| Sound (db) | 60 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-10 |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

1000KVA 416 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|