


OFFICIAL QUOTE

112KVA 440 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER



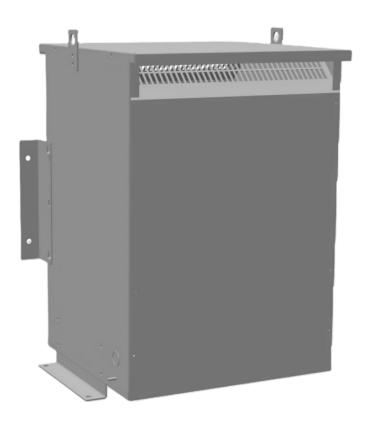

112KVA 440 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,389.80 USD


Three Phase Autotransformer with a capacity of 112.5kVA, transforming 440Y Volts to 550Y Volts

SKU: RA112H2-J2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 112.5kVA, transforming 440Y Volts to 550Y Volts



OFFICIAL QUOTE



112KVA 440 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	145 lbs
Phases	<u>3</u>
kVA	112.5
Connection	<u>3PhA-NT-1</u>
Primary Voltage	440
Primary Max Current	147.6A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	300MCM-6
Secondary Voltage	<u>550</u>
Secondary Max Current	118.1A
Secondary Markings	H1-H2-H3
Secondary Terminals	<u>300MCM-6</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

112KVA 440 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------