


OFFICIAL QUOTE

75KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



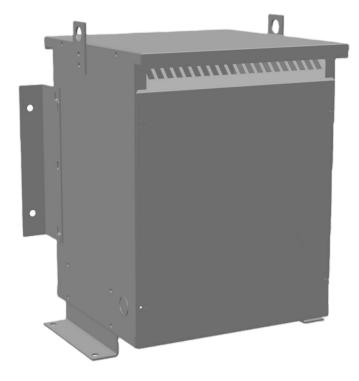

75KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$1,980.52 USD

Single Phase Autotransformer with a capacity of 75kVA, transforming 277 Volts to 347 Volts

SKU: MC75D-E Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



H0 / X0	X1	H1

Single Phase Autotransformer with a capacity of 75kVA, transforming 277 Volts to 347 Volts



OFFICIAL QUOTE

75KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	165.6 lbs	
Phases	1	
kVA	<u>75</u>	
Connection	<u>1PhA-NT-1</u>	
Primary Voltage	120/240	
Primary Max Current	<u>156.3A</u>	
Primary Markings	<u>X0-X1</u>	
Primary Terminals	<u>300MCM-6</u>	
Secondary Voltage	<u>347</u>	
Secondary Max Current	<u>124.8A</u>	
Secondary Markings	<u>H0-H1</u>	
Secondary Terminals	<u>300MCM-6</u>	
Primary Taps	N/A	
Conductor Material	<u>Copper</u>	
Insulation Class	<u>220°C (Class H)</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	<u>N/A</u>	
Impedance Range	<u>1.0 – 3.0%</u>	
Sound (db)	<u>45 dB</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	<u>E3R-4</u>	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	



OFFICIAL QUOTE

75KVA 277 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM