


OFFICIAL QUOTE

150KVA 440 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



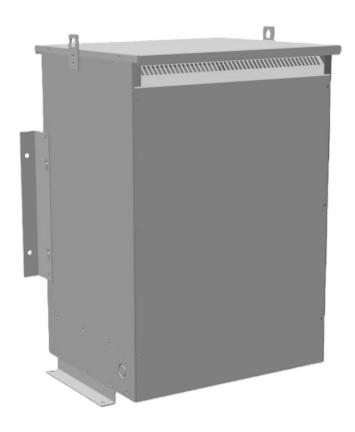

150KVA 440 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER

\$9,409.10 CAD

Three Phase Autotransformer with a capacity of 150kVA, transforming 440Y Volts to 240Y Volts

SKU: RC150H2-C

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 440Y Volts to 240Y Volts



OFFICIAL QUOTE



PRODUCT SPECIFICATIONS

| | E76 II |
|----------------------------|--|
| Weight | 576 lbs |
| Phases | 3 |
| kVA | <u>150</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 440 |
| Primary Max Current | 196.8A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | 600MCM-2 |
| Secondary Voltage | 240 |
| Secondary Max Current | 360.8A |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>1.5 - 3.5%</u> |
| Sound (db) | <u>55</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-7</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

150KVA 440 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|