


#### **OFFICIAL QUOTE**

## 150KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



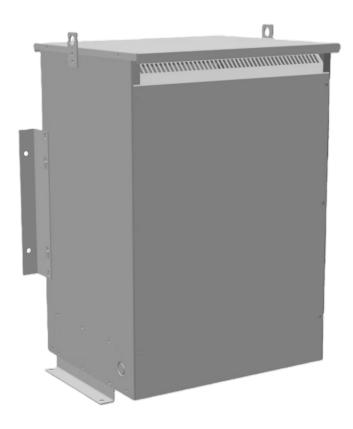

# 150KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$7,434.30 CAD

Single Phase Autotransformer with a capacity of 150kVA, transforming 416 Volts to 240 Volts

**SKU:** MC150G-C

**Categories:** <u>Autotransformer</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 150kVA, transforming 416 Volts to 240 Volts



## **OFFICIAL QUOTE**



## 150KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 521.5 lbs  |
| Phases                     | 1  |
| kVA                        | <u>150</u>   |
| Connection                 | <u>1PhA-NT-1</u>   |
| Primary Voltage            | 416  |
| Primary Max Current        | 208.2A   |
| Primary Markings           | <u>H0-H1</u>   |
| Primary Terminals          | 600MCM-2   |
| Secondary Voltage          | 240  |
| Secondary Max Current      | 360.8A   |
| Secondary Markings         | <u>X0-X1</u>   |
| Secondary Terminals        | <u>Pads</u>  |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.5 - 3.5%   |
| Sound (db)                 | <u>55 dB</u>   |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-7</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



## **OFFICIAL QUOTE**

# 150KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|