


OFFICIAL QUOTE

150KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



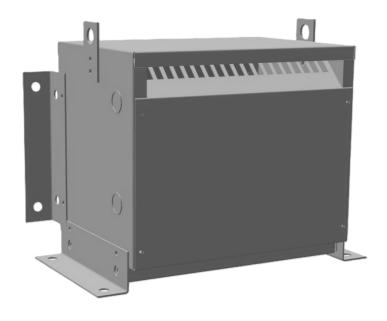

150KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,576.10 CAD


Three Phase Autotransformer with a capacity of 150kVA, transforming 415Y Volts to 440Y Volts

SKU: RC150G2-H2

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 415Y Volts to 440Y Volts



OFFICIAL QUOTE



150KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	64 lbs
Phases	<u>3</u>
kVA	150
Connection	<u>3PhA-NT-1</u>
Primary Voltage	415
Primary Max Current	208.7A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	600MCM-2
Secondary Voltage	440
Secondary Max Current	<u>196.8A</u>
Secondary Markings	H1-H2-H3
Secondary Terminals	600MCM-2
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 415 VOLTS TO 440 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------